SIAM J. CONTROL OPTIM.
Vol. 62, No. 6, pp. 2884–2909

© 2024 Society for Industrial and Applied Mathematics

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

SPARSE PARAMETER IDENTIFICATION FOR STOCHASTIC SYSTEMS BASED ON L_γ REGULARIZATION*

JIAN GUO†, YING WANG†, YANLONG ZHAO†, AND JI-FENG ZHANG‡

Abstract. This paper is concerned with the reconstruction of the zero and nonzero elements of the sparse parameter vector of stochastic systems with general observation sequences. A sparse parameter identification algorithm based on the L_γ penalty with $0 < \gamma < 1$ and the residual sum of squares is proposed. Without requiring independently and identically distributed (i.i.d.) and stationary conditions on the observation sequences, the proposed algorithm is proved that not only the contributing variable corresponding to the nonzero parameters can be selected out with probability converging to one but also the estimates of the nonzero parameters have the asymptotic normality property. In order to improve the performance of the L_γ regularization method, a two-step algorithm based on the adaptively weighted L_γ penalty with $0 < \gamma \leq 1$ is designed whose set and parameter almost sure convergence are established with non-i.i.d. and nonstationary observation sequences. The proposed methods are applied to the structure selection of the nonlinear autoregressive models with exogenous variables and the sparse parameter identification of the linear feedback control systems. Finally, three numerical examples are given to verify the efficiency of the theoretical results.

Key words. stochastic system, sparse identification, L_γ penalty, asymptotic normality, strong consistency

MSC codes. 93E03, 93E12, 93E24

DOI. 10.1137/23M1599513

1. Introduction.

Sparsity problems are occurring in many areas of scientific research and engineering practice and have attracted considerable attention in recent years. Exemplary applications involve image processing [25, 30], wireless communication [13, 27], biometrics [31], compressed sampling [3], and so on. One of the most interesting issues is the exact reconstruction of zero and nonzero elements of sparse parameter vectors. This is of great importance in engineering applications, as it provides a way to implement a parsimonious model with better predictive performance and can reduce the curse of dimensionality.

Classical parameter identification is a rapidly developing field for the reconstruction of system elements and has achieved great success in both theoretical research and practical applications [6, 26]. A series of prestigious methods have been developed, including stochastic gradient descent, stochastic approximation, least squares (LS), least mean squares, and so on. These methods are usually obtained by minimizing

*Received by the editors September 7, 2023; accepted for publication (in revised form) July 31, 2024; published electronically November 4, 2024.
https://doi.org/10.1137/23M1599513
Funding: The work is supported by the National Key R&D Program of China under grant 2018YFA0703800; the National Natural Science Foundation of China under grants T2293770, 62025306, 62303452, and 62433020; the CAS Project for Young Scientists in Basic Research under grant YSBR-008; and the China Postdoctoral Science Foundation under grant 2022M720159.

†Key Laboratory of Systems and Control, Academy of Mathematics and Systems Science, Chinese Academy of Sciences, Beijing 100190, People's Republic of China, and School of Mathematics Sciences, University of Chinese Academy of Sciences, Bejing 100149, People's Republic of China (j.guo@amss.ac.cn, wangying96@amss.ac.cn, ylzhao@amss.ac.cn).
‡School of Automation and Electrical Engineering, Zhongyuan University of Technology, Zhengzhou 450007, People's Republic of China; Key Laboratory of Systems and Control, Academy of Mathematics and Systems Science, Chinese Academy of Sciences, Beijing 100190, People's Republic of China; and School of Mathematics Sciences, University of Chinese Academy of Sciences, Bejing 100149, People's Republic of China (jif@iss.ac.cn).

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

some criterion, such as the square error between the predicted and observed signals, and have some theoretical properties, such as consistency, convergence rate, asymptotic normality, and so on. However, for sparse systems, since they tend to be high-dimensional or have a limited number of samples, these classical theories and methods will no longer be valid.

In the field of statistics, a number of effective and widely used methods have emerged for sparse problems [9]. For instance, there are several classical criteria to implement variable selection, such as the Akaike information criterion (AIC) [1] and the Bayesian information criterion (BIC) [32]. However, they are not applicable to high-dimensional data, as they may involve solving NP-hard optimization problems. Subsequently, regularization methods are proposed and widely used as a solution to sparse problems. Typically, regularization is designed by adding a penalty term to the LS objective, where the penalty term is generally defined as a norm over the parameter space. L_0 regularization is the first regularization method applied to variable selection, which can produce the sparsest solution but requires solving a combinatorial optimization problem whose complexity grows exponentially with dimension. [33] proposed an alternative method called LASSO, which converts the combinatorial optimization problem of variable selection into an easily solvable quadratic programming problem but is not as sparse as L_0 regularization. Thereafter, various regularization methods. such as smoothly clipped absolute deviation [9], adaptive LASSO [43], elastic net [44], and so on, have become the main tools for data analysis. In addition, [18] considers the asymptotic behavior of regression estimates that minimize the sum of squared residuals plus the L_γ penalty. [37] and [38] addressed the particular importance of $L_{1/2}$ regularization in sparse modeling and obtained promising practical results in image processing, matrix filling, and so on.

With the rapid development of variable selection in statistics, some of these ideas and methods have been applied to stochastic systems and control. For instance, [34] used L_0 regularization to obtain the sparsest estimate of the parameter vector. [24] utilized L_1 regularization to identify the system parameters and predict future signals assuming that the output noise components exhibited strong seriality and cross-sectional correlation. [42] introduced an LS sparse parameter identification algorithm based on the L_1 penalty with adaptive weights and proved its convergence with general observation sequences, and then [12] generalized this approach to multivariate ARMA systems with exogenous inputs. In addition, some nonconvex regularization methods are also employed for stochastic systems. [11] suggested a simple numerical scheme to compute solutions with minimal L_γ norm and studied its convergence. [29] proposed a new sparse signal reconstruction algorithm based on the minimization of the squared error of a smooth L_γ ($\gamma < 1$) norm regularization, which provided better signal reconstruction performance. [36] presented generalized shrinkage penalties with explicit proximal mappings and thus gave iterative γ-shrinkage iterative algorithms that could be implemented to accurately recover a given sparse data with a given measurement matrix. However, these papers about nonconvex penalized methods do not give theoretical results like that in [42]: whether the solutions obtained by nonconvex regularization methods are still convergent in the nonstationary and nonindependently and identically distributed (i.i.d.) situation.

Motivation of this work. As known in the literature, the L_1 regularization method has led to remarkable progress in sparse problems. However, L_1 regularization suffers from bias, leading to a heavily biased estimate and not achieving reliable recovery with the fewest observations [4]. Besides, L_1 regularization may produce inconsistent selections when applied to some situations [43]. In contrast, the nonconvex

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

penalty, such as L_γ $(0<\gamma<1)$ regularization, has the advantage of improving the bias problem and has led to significant performance improvements in many applications. For instance, [19] demonstrated the very high efficiency of applying $L_{1/2}$ and $L_{2/3}$ regularization to image deconvolution. This motivates us to investigate nonconvex penalties in the fields of systems and control. However, in the existing literature on the nonconvex regularization, the noise is usually required to be i.i.d., there is prior knowledge of the sample probability distribution, or the observed sequences are deterministic [10]. These conditions are difficult to satisfy for stochastic systems, especially feedback control systems. Besides, it is not clear whether the estimates obtained by utilizing such an approach in sparse system identification still have the theoretical asymptotic properties.

Thus, this paper sets out to investigate the nonconvex $L_\gamma(0<\gamma<1)$ regularization method in sparse identification problems of stochastic dynamic systems with general observation sequences and non-i.i.d. noise. The main contributions of this paper are as follows:

- This paper proposes a sparse parameter identification algorithm based on the L_γ $(0<\gamma<1)$ penalty and the residual sum of squares for stochastic sparse systems with non-i.i.d. and nonstationary observation sequences and non-i.i.d. noise. This algorithm yields significantly better performance in terms of sparsity induction and efficiency compared to the convex penalty. In addition, the theoretical properties of this algorithm are established. Specifically, the almost sure convergence of the estimates is proven. Besides, the set convergence in probability is shown; i.e., the probability that the proposed algorithm correctly selects the nonzero elements of the unknown sparse parameter vector converges to one. Moreover, the asymptotic normality of the parameter estimates is obtained. These results incorporate the results of a bridge estimate [18] and do not require additional strong irrepresentable conditions compared with LASSO [40].
- In order to improve the performance of the L_γ regularization method, motivated by [42] and [43], a two-step algorithm based on the adaptively weighted $L_\gamma(0<\gamma\leq 1)$ penalty and the residual sum of squares is proposed. For the case of non-i.i.d. and nonstationary observation sequences and non-i.i.d. noise, not only is almost sure parameter convergence established, but also almost sure set convergence is achieved; i.e., this algorithm correctly selects the nonzero elements of the unknown sparse parameter vector with probability one using a finite number of observations. Moreover, this algorithm is more efficient in sparsity induction than the adaptive LASSO and the algorithm in [42] and covers their results when $\gamma=1$.
- The proposed sparse identification algorithms in this paper are applied to two kinds of typical scenes in stochastic sparse systems with non-i.i.d. observation sequences. Specifically, the proposed algorithms can efficiently select the contributing basis functions out for the nonlinear autoregressive exogenous (NARX) model. Furthermore, the proposed algorithm is able to accurately reconstruct the sparse parameters of the linear feedback control systems with non-i.i.d. and nonstationary observation sequences and non-i.i.d. noise.

The rest of this paper is organized as follows. Section 2 gives the problem formulation. Section 3 proposes the $L_\gamma(0<\gamma<1)$ regularization algorithm, establishes its theoretical results, and compares it with related works. Section 4 gives an adaptively weighted two-step algorithm and investigates its properties. In section 5, the proposed algorithm is applied to accomplish the structure selection of the NARX model and

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

the sparse identification of the linear feedback control systems. In section 6, three typical simulation examples are given to illustrate the algorithms' performance. And in section 7, some concluding remarks and further works are provided.

Notation: Let $(\Omega, \mathcal{F}, \mathrm{P})$ be the probability space, $\omega \in \Omega$ be the sample points, and $E(\cdot)$ be the expectation operator. $\|\cdot\|_1$ and $\|\cdot\|$ denote the 1-norm and 2-norm for vectors or matrices, respectively. By $\mathbb{R}$ and $\mathbb{N}_+$, we denote the sets of real numbers and positive integers, respectively. $\mathbf{I}_p$ represents a unit matrix of order p and $0_p = [0, \ldots, 0]^T \in \mathbb{R}^p$. Moreover, $\mathrm{sign}(\cdot)$ is defined as $\mathrm{sign}(x) = 1$ when $x \geq 0$ and $\mathrm{sign}(x) = -1$ when $x < 0$, $\mathrm{vec}(x_j)|_{j=1}^q$ means $[x_1, x_2, \ldots, x_q]^T$, and for a set A, by A^c, we denote the complement of A. For any two positive sequences $\{a_k\}_{k\geq 1}$ and $\{b_k\}_{k\geq 1}$, $a_k = O(b_k)$ means that there are $c > 0$ and $k_0 \in \mathbb{N}_+$ such that $a_k \leq cb_k$ for all $k \geq k_0$, and $a_k = o(b_k)$ means that $a_k/b_k \to 0$ as $k \to \infty$. For two random sequences $\{x_k\}$ and $\{y_k\}$, we give the following two frequently used definitions in this paper:

- $x_k = O_p(y_k)$ means that for any $\epsilon > 0$, there is a finite $M > 0$ and a finite $N > 0$ such that $\mathrm{P}\{|x_k| \geq M|y_k|\} < \epsilon$ for all $k \geq N$.
- $x_k = o_p(y_k)$ means that $x_k/y_k \xrightarrow{P} 0$ as $k \to \infty$, where $\xrightarrow{P}$ means convergence in probability.

2. Problem formulation.

Consider the stochastic sparse system

$$y_{k+1} = \theta^T \varphi_k + w_{k+1}, \quad k \geq 0, \tag{2.1}$$

where $\theta = [\theta(1), \ldots, \theta(p)]^T \in \mathbb{R}^p$ is the unknown p-dimensional parameter vector containing many zero values; $\varphi_k \in \mathbb{R}^p$, consisting of possibly current and past inputs and outputs, is the stochastic regressor vector; and y_{k+1} and w_{k+1} are the system output and noise, respectively. Denote the zero elements set of the unknown parameter θ by $A^* = \{j : \theta(j) = 0,\ j \in \{1, \ldots, p\}\}$. Suppose that there are q nonzero elements in the vector θ. Without loss of generality, we assume that $\theta(j) = 0$ for $j = q+1, \ldots, p$.

Problem. The identification problem of the stochastic sparse system is to infer the zero elements A^* and to estimate the nonzero elements of the unknown parameter vector θ by using the observed data $\{y_{k+1}, \varphi_k\}_{k=1}^n$.

Before giving the sparse identification algorithm, the following assumptions are introduced.

Assumptions. Denote the family of the σ-algebras $\{\mathcal{F}_k\}$ as

$$\mathcal{F}_k = \sigma\{\varphi_0, \ldots,\ \varphi_k, w_1, \ldots, w_k\}, \quad k \geq 1;$$

the maximum and minimum eigenvalues of $\sum_{k=1}^n \varphi_k \varphi_k^T$ as $\lambda_{\max}(n)$ and $\lambda_{\min}(n)$, respectively; and the maximum eigenvalue of $E\sum_{k=1}^n \varphi_k \varphi_k^T$ as $\lambda_{E,\max}(n)$.

(A1) The noise $\{w_k, \mathcal{F}_k\}_{k\geq 1}$ is a martingale difference sequence, and there is $\delta > 0$ such that $\sup_k E\left[|w_{k+1}|^{2+\delta} \mid \mathcal{F}_k\right] < \infty$ a.s.

(A2) (a) For the maximal and minimal eigenvalues of $\sum_{k=1}^n \varphi_k \varphi_k^T$, it holds that

$$\frac{\log \lambda_{\max}(n)}{\lambda_{\min}(n)} \xrightarrow[n\to\infty]{} 0 \text{ a.s.}$$

(b) For each n, there is a positive number d_n such that

$$\frac{d_n}{\lambda_{\min}(n)} = O_p(1) \text{ and } \frac{\sqrt{\lambda_{E,\max}(n)}}{d_n} \xrightarrow[n\to\infty]{} 0.$$

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

Remark 2.1. In Assumption (A1), a sequence of martingale differences is broader than a sequence of independent variables, which implies a much milder restriction on sequence memory than independence and allows w_{k+1} to depend on $\mathcal{F}_k$. Many random variables, such as Gaussian random variables, zero-mean uniformly distributed random variables, and so on, all satisfy this assumption. Assumption (A2) is about the system observation sequences. Assumption (A2)(a) is the classical weakest strong convergence condition for LS [22].

3. L_γ regularization algorithm and its properties. This section constructs a sparse identification algorithm based on $L_\gamma (0<\gamma<1)$ regularization and gives the corresponding theoretical properties.

3.1. L_γ regularization algorithm. We start by giving the objective function based on the L_γ penalty with $0<\gamma<1$ and residual sum of squares,

$$J_n(\beta)=\sum_{k=1}^{n}\left(y_{k+1}-\beta^T\varphi_k\right)^2+\lambda_n\sum_{l=1}^{p}|\beta(l)|^\gamma, \tag{3.1}$$

where λ_n is a penalty parameter and $\beta=[\beta(1),\ldots,\beta(p)]^T$.

Assumption. We first give the following assumption about the parameter λ_n.

(A3) The penalty parameter $\{\lambda_n\}$ of (3.1) satisfies that

(a) $\frac{\lambda_n}{\lambda_{\min}(n)}\xrightarrow[n\to\infty]{}0$ a.s., (b) $\frac{\lambda_n}{\lambda_{E,\max}(n)^{1/2}}\xrightarrow[n\to\infty]{}0$, (c) $\frac{\lambda_n d_n^{2-\gamma}}{\lambda_{E,\max}(n)^{2-\frac{1}{2}\gamma}}\xrightarrow[n\to\infty]{}\infty$.

Remark 3.1. Assumption (A3) covers the classical persistent excitation condition as a special case, i.e., $C_1 n\le\lambda_{\min}(n)\le\lambda_{\max}(n)\le C_2 n$ for some constants C_1 and C_2. Assumption (A3)(c) implies that $\lambda_n\to\infty$. Specifically, d_n in (A2)(b) can be n and $\lambda_{E,\max}(n)=O(n)$. Thus, for any given $0<\gamma<1$, λ_n can be chosen as n^α with $\frac{1}{2}\gamma<\alpha<\frac{1}{2}$ to meet Assumption (A3).

Algorithm. The sparse identification algorithm based on the L_γ penalty is designed in Algorithm 3.1. This algorithm provides a method for combining variable selection and parameter estimation in a single step.

Remark 3.2. We now discuss the feasibility of (3.3). First, the global minimum point of nonconvex function $J_n(\beta)$ exists (not infinity). This is because $J_n(\beta)$ is continuous and there exists a minimum point on any compact set, and since $\|\beta\|\to\infty$, $J_n(\beta)\to\infty$, the point that minimizes $J_n(\beta)$ must be finite. Thus, (3.3) is a

Algorithm 3.1 L_γ regularization.

Step 0 (initialization). For given $0<\gamma<1$, choose a positive sequence $\{\lambda_n\}_{n\ge1}$ satisfying (A3).

Step 1 (sparse optimization with the L_γ penalty). With γ and λ_n, optimize the objective function

$$J_n(\beta)=\sum_{k=1}^{n}\left(y_{k+1}-\beta^T\varphi_k\right)^2+\lambda_n\sum_{l=1}^{p}|\beta(l)|^\gamma, \tag{3.2}$$

and obtain

$$\beta_n=[\beta_n(1),\ldots,\beta_n(p)]^T=\operatorname*{argmin}_{\beta}\ J_n(\beta), \tag{3.3}$$

$$A_n^*=\{j:\beta_n(j)=0,j\in\{1,\ldots,p\}\}. \tag{3.4}$$

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

well-defined estimator. Second, we present the computation methods of (3.3). It is worth noting that the standard gradient-based method fails to solve this problem because the penalty objective function $J_n(\beta)$ is nondifferentiable when β has zero components. A large number of approximate algorithms and nonconvex optimization solvers have emerged to solve this problem. For instance, [37] proposed an iterative half-thresholding algorithm for fast solution of $L_{1/2}$ regularization, and [20] and [29] designed solving algorithms by approximating the L_γ penalty with a function that has finite gradient at zero. In addition, genetic algorithms, particle swarm algorithms, simulated annealing algorithms, and so on can be used to solve nonconvex optimization problems as well as solvers such as IPOPT [35]. However, none of the above methods provide sufficient theoretical support. Thus, the focus of this paper is not on the discussion of the solution method of (3.3) but on the properties of its solution.

Remark 3.3. The currently existing papers on the sparse identification of the L_γ penalty either lack theory, as in the papers [11, 29, 36], or discuss its properties only under the i.i.d. and stationary condition, as in the papers [9, 18, 38]. However, in the fields of system and control, the regressor φ_k is generally nonstationary and nonindependent because any real feedback controller depends essentially on the system output and hence the driven noise [17]. The main point of interest in this paper is whether the estimates (3.3) and (3.4) remain parameter convergence, set convergence, and asymptotic normality under nonstationary and nonindependent conditions.

Remark 3.4. [42] proved the convergence of the L_1 penalty with adaptive weights under a nonstationary and nonindependent assumption, while the L_γ penalty is more efficient in sparsity induction than the L_1 penalty. We give an example to explain. Consider the autoregression with extra input (ARX) system, $y_{k+1} = \theta_1 y_k + \theta_2 u_k + w_{k+1}$, with the true parameters $\theta_1 = 1$ and $\theta_2 = 0$. Let $\beta = [\beta_1, \beta_2]^T$. By Lagrange's multiplier method, the regularized LS problem (3.3) is equivalent to solving

$$\min_{\beta} \quad J(\beta) = \sum_{k=1}^{n} (y_{k+1} - \beta_1 y_k - \beta_2 u_k)^2 \qquad \text{s.t.} \qquad |\beta_1|^\gamma + |\beta_2|^\gamma \le s$$

for some $s > 0$. Figure 1 shows the objective function equivalence graphs of L_1 and $L_{1/2}$ penalties. The constraint region of the L_1 penalty is a square after rotation, and the constraint region of the $L_{1/2}$ penalty is a graph concave inward. The solution to this problem occurs when the contour $J(\beta)$ is first tangent to the constraint region. It can be seen that the solutions of both L_1 and $L_{1/2}$ penalties may appear at the corners, which leads to a sparse solution. This geometrically demonstrates the sparsity of $L_\gamma (0 < \gamma \le 1)$ regularization. Moreover, the solution of the $L_{1/2}$ regularized LS

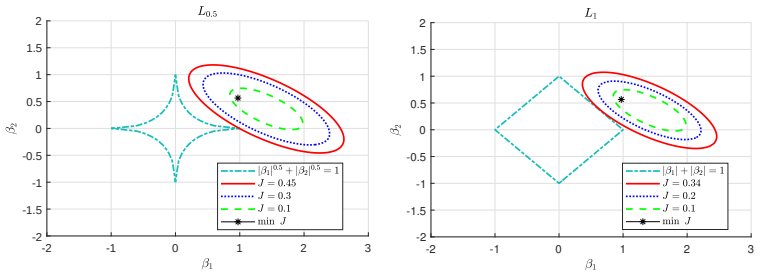

FIG. 1. *L_1 penalty vs. $L_{1/2}$ penalty.*

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

problem is more likely to appear at the corners, which implies that the solution of the $L_{1/2}$ regularized LS problem is sparser than L_1.

Remark 3.5. Now we give a way of choosing penalty parameter λ_n in Algorithm 3.1 for general cases. If $\frac{\lambda_{E,\max}(n)^{3/2-\gamma/2}}{d_n^{2-\gamma}} \xrightarrow[n\to\infty]{} 0$ and $\frac{\sqrt{\lambda_{E,\max}(n)}}{\lambda_{\min}(n)} = O(1)$ a.s., then, for any $0<\beta<1$, $\lambda_n = \frac{\lambda_{E,\max}(n)^{(\frac{3}{2}-\frac{1}{2}\gamma)\beta+1/2}}{d_n^{(2-\gamma)\beta}}$ satisfies Assumption (A3).

3.2. Theoretical properties. This section will give the theoretical properties of Algorithm 3.1. To prove these properties, we first give the following proposition.

PROPOSITION 3.6. [23]. *For the system* (2.1)*, if Assumptions* (A1) *and* (A2) *hold, then* $\|(\sum_{k=1}^n \varphi_k\varphi_k^T)^{-\frac{1}{2}}\sum_{k=1}^n \varphi_k w_{k+1}\| = O(\sqrt{\log\lambda_{\max}(n)})$ a.s.

For the estimate β_n and A_n^* generated by Algorithm 3.1, the following theorem shows the almost sure convergence of the estimates.

THEOREM 3.7. *Under Assumptions* (A1), (A2)(a)*, and* (A3)(a)*, the estimate given by Algorithm* 3.1 *is almost surely convergent, i.e.,* $\lim_{n\to\infty}\beta_n = \theta$ a.s.

Proof. Noting that β_n is the minimizer of $J_n(\beta)$ in Algorithm 3.1, we have $J_n(\beta_n) \le J_n(\theta)$. Since $\lambda_n > 0$, $|\beta_n(j)|^\gamma \ge 0$, by (3.2) and a direct calculation, we have

$$\begin{aligned}\lambda_n\sum_{j=1}^p|\theta(j)|^\gamma &\ge \sum_{i=1}^n\left(y_{i+1}-\varphi_i^T\beta_n\right)^2-\sum_{i=1}^n\left(y_{i+1}-\varphi_i^T\theta\right)^2\\ &= (\beta_n-\theta)^T\sum_{i=1}^n(\varphi_i\varphi_i^T)(\beta_n-\theta)+2\sum_{i=1}^n\varphi_i^T(\theta-\beta_n)w_{i+1}. \end{aligned}\tag{3.5}$$

Let $P_n = \sum_{i=1}^n\varphi_i\varphi_i^T$, $\delta_n = P_n^{1/2}(\beta_n-\theta)$, and $Q_n = \left(\sum_{k=1}^n\varphi_k\varphi_k^T\right)^{-\frac{1}{2}}\sum_{k=1}^n\varphi_k w_{k+1}$. Then (3.5) becomes

$$\begin{aligned}&(\beta_n-\theta)^T\sum_{i=1}^n(\varphi_i\varphi_i^T)(\beta_n-\theta)+2\sum_{i=1}^n\varphi_i^T(\theta-\beta_n)w_{i+1}\\ &= \delta_n^T\delta_n-2\left[\left(\sum_{i=1}^n\varphi_i\varphi_i^T\right)^{-1/2}\sum_{i=1}^n\varphi_i w_{i+1}\right]^T\delta_n = \delta_n^T\delta_n-2Q_n^T\delta_n. \end{aligned}\tag{3.6}$$

From (3.5) and (3.6), it follows that $\delta_n^T\delta_n-2Q_n^T\delta_n-\lambda_n\sum_{j=1}^p|\theta(j)|^\gamma\le 0$, which implies that $\|\delta_n-Q_n\|^2-\|Q_n\|^2-\lambda_n\sum_{j=1}^p|\theta(j)|^\gamma\le 0$. Hence, we have

$$\begin{aligned}\|\delta_n-Q_n\| &\le \sqrt{\|Q_n\|^2+\lambda_n\sum_{j=1}^p|\theta(j)|^\gamma}\\ &\le \sqrt{\|Q_n\|^2+\lambda_n\sum_{j=1}^p|\theta(j)|^\gamma+2\|Q_n\|\left(\lambda_n\sum_{j=1}^p|\theta(j)|^\gamma\right)^{1/2}}\\ &= \|Q_n\|+\left(\lambda_n\sum_{j=1}^p|\theta(j)|^\gamma\right)^{1/2}. \end{aligned}$$

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

Then, by the triangular inequality, we have $\|\delta_n\| \le \|\delta_n - Q_n\| + \|Q_n\| \le 2\|Q_n\| + (\lambda_n \sum_{j=1}^{p} |\theta(j)|^{\gamma})^{1/2}$. Noting Proposition 3.6 and that $\lambda_n \sum_{j=1}^{p} |\theta(j)|^{\gamma} = O(\lambda_n)$, it follows that $\|\beta_n - \theta\| = O(\sqrt{\frac{\log \lambda_{\max}(n)}{\lambda_{\min}(n)}} + \sqrt{\frac{\lambda_n}{\lambda_{\min}(n)}})$ a.s. By Assumptions (A2)(a) and (A3)(a), the proof is completed. ∎

Next, we discuss the set convergence in probability of the estimates, starting with the following lemma to illustrate the convergence properties in probability of the estimation error.

LEMMA 3.8. *If Assumptions* (A1), (A2), *and* (A3)(a)–(b) *hold, then*

$$\|\beta_n - \theta\| = O_p\left(\frac{\sqrt{q\lambda_{E,\max}(n)}}{d_n}\right). \tag{3.7}$$

Proof. To prove $\|\beta_n - \theta\| = O_p(\sqrt{q\lambda_{E,\max}(n)}/d_n)$, it is sufficient to prove that for any $\epsilon_1 > 0$, there exists a finite $\tilde{M} > 0$ and N such that for any $n > N$, $\mathrm{P}(\|\beta_n - \theta\| > \tilde{M}\sqrt{q\lambda_{E,\max}(n)}/d_n) \le \epsilon_1$. Let $h_n = d_n/\sqrt{q\lambda_{E,\max}(n)}$. By the fact that $\forall \epsilon > 0$,

$$\mathrm{P}(h_n \|\beta_n - \theta\| > \tilde{M}) \le \mathrm{P}(\|\beta_n - \theta\| \ge \epsilon/2) + \mathrm{P}\left(\tilde{M}/h_n < \|\beta_n - \theta\| < \epsilon/2\right), \tag{3.8}$$

we divide the proof into two steps: One is to prove $\mathrm{P}(\|\beta_n - \theta\| \ge \epsilon/2) \le \frac{\epsilon_1}{3}$, and the other is to prove $\mathrm{P}(\tilde{M}/h_n < \|\beta_n - \theta\| < \epsilon/2) \le \frac{2\epsilon_1}{3}$. Specifics are as follows.

Step 1: By Theorem 3.7, the probability $\mathrm{P}(\|\beta_n - \theta\| \ge \epsilon/2)$ converges to zero, which means that for any given $\epsilon_1 > 0$, there is a finite $N_1 \in \mathbb{N}_+$ such that for all $n > N_1$,

$$\mathrm{P}(\|\beta_n - \theta\| \ge \epsilon/2) \le \epsilon_1/3. \tag{3.9}$$

Step 2: This step is to prove $\mathrm{P}(\tilde{M}/h_n < \|\beta_n - \theta\| < \epsilon/2) \le \frac{2\epsilon_1}{3}$. For each $n \in \mathbb{N}_+$, denote $S_{j,n} = \left\{\beta : 2^{j-1} < h_n \|\beta - \theta\| < 2^j\right\}$ for $j \in \mathbb{Z}$. By Assumption (A2)(b), there is a finite $M_1 > 0$ and a finite $N_2 \in \mathbb{N}_+$ such that for all $n > N_2$,

$$\mathrm{P}(\lambda_{\min}(n) \le M_1 d_n) = \mathrm{P}(d_n \lambda_{\min}(n)^{-1} \ge M_1^{-1}) \le \frac{\epsilon_1}{3}. \tag{3.10}$$

Denote $A_n = \{\omega : \lambda_{\min}(n) \le M_1 d_n\}$. By the definition of $S_{j,n}$ and (3.10), we have

$$\begin{aligned} &\mathrm{P}\left(2^M/h_n < \|\beta_n - \theta\| < \epsilon/2\right) \\ &\quad \le \mathrm{P}\left(\{\omega : \beta_n \in S_{j,n}\ \forall j \ge M+1,\ 2^{j+1} \le \epsilon h_n\} \cap A_n^c\right) + \mathrm{P}(A_n) \\ &\quad \le \sum_{j \ge M+1, 2^{j+1} \le \epsilon h_n} \mathrm{P}(\{\omega : \beta_n \in S_{j,n}\} \cap A_n^c) + \frac{\epsilon_1}{3}. \end{aligned} \tag{3.11}$$

Since β_n is the minimum of $J_n(\beta)$, for any set A containing the point β_n, we have $\inf_{\beta \in A}(J_n(\beta) - J_n(\theta)) \le 0$, which implies that

$$\{\omega :\ \beta_n \in A\} \subset \left\{\omega :\ \inf_{\beta \in A}(J_n(\beta) - J_n(\theta)) \le 0\right\}. \tag{3.12}$$

Thus, by (3.12) and (3.11), we have

$$\begin{aligned} &\mathrm{P}\left(2^M/h_n < \|\beta_n - \theta\| < \epsilon/2\right) \\ &\quad \le \frac{\epsilon_1}{3} + \sum_{j \ge M, 2^j \le \epsilon h_n} \mathrm{P}\left(\left\{\inf_{\beta \in S_{j,n}}(J_n(\beta) - J_n(\theta)) \le 0\right\} \cap A_n^c\right). \end{aligned} \tag{3.13}$$

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

Next, we consider the right-hand side of (3.13). Let $\beta=[\beta(1),\ldots,\beta(p)]^T\in S_{j,n}$. Since $|\beta(j)|^\gamma>0$ and $\theta(j)=0$ for $j=q,q+1,\ldots,p$, similar to (3.5), we have

$$\begin{aligned} J_n(\beta)-J_n(\theta)&=(\beta-\theta)^T\sum_{i=1}^n(\varphi_i\varphi_i^T)(\beta-\theta)\\ &\quad+2\sum_{i=1}^n\varphi_i^T(\theta-\beta)w_{i+1}+\lambda_n\sum_{j=1}^q\left[|\beta(j)|^\gamma-|\theta(j)|^\gamma\right]. \end{aligned}\tag{3.14}$$

For the first term on the right-hand side of (3.14), by noting that $\beta\in S_{j,n}$ and (3.10), for any $\omega\in A_n^c$, it follows that

$$\begin{aligned} (\beta-\theta)^T\sum_{i=1}^n(\varphi_i\varphi_i^T)(\beta-\theta)&\geq\lambda_{\min}(n)\|\beta-\theta\|^2\\ &\geq\lambda_{\min}(n)2^{2j-2}h_n^{-2}\geq M_1d_n2^{2j-2}h_n^{-2}. \end{aligned}\tag{3.15}$$

For the third term on the right-hand side of (3.14), by the mean value theorem, there exists ξ_j between $\beta(j)$ and $\theta(j)$ such that

$$\lambda_n\sum_{j=1}^q\left||\beta(j)|^\gamma-|\theta(j)|^\gamma\right|=\lambda_n\gamma\sum_{j=1}^q|\xi_j|^{\gamma-1}\left|\beta(j)-\theta(j)\right|.$$

Since $\|\beta-\theta\|<\epsilon/2$, there is some constant $C_1>0$ such that $|\xi_j|^{\gamma-1}<C_1$. Thus,

$$\begin{aligned} \lambda_n\sum_{j=1}^q\left||\beta(j)|^\gamma-|\theta(j)|^\gamma\right|&\leq C_1\lambda_n\gamma\sum_{j=1}^q|\beta(j)-\theta(j)|\\ &\leq C_1\lambda_n\gamma\sqrt{q}\|\beta-\theta\|\leq C_1\lambda_n\gamma\sqrt{q}2^jh_n^{-1}. \end{aligned}\tag{3.16}$$

Then it follows from (3.16) that

$$\lambda_n\sum_{j=1}^q\left[|\beta(j)|^\gamma-|\theta(j)|^\gamma\right]\geq-C_1\lambda_n\gamma\sqrt{q}2^jh_n^{-1}.\tag{3.17}$$

Hence, by (3.14), (3.15), and (3.17), we have, for any $\omega\in A_n^c$,

$$J_n(\beta)-J_n(\theta)\geq M_1d_n2^{2j-2}h_n^{-2}-C_1\lambda_n\gamma2^jh_n^{-1}-\sup_{\beta\in S_{j,n}}2\left|\sum_{i=1}^n\varphi_i^T(\theta-\beta)w_{i+1}\right|.\tag{3.18}$$

When $\inf_{\beta\in S_{j,n}}\left(J_n(\beta)-J_n(\theta)\right)\leq0$, by (3.18), for any $\omega\in A_n^c$, the following inequality holds:

$$\sup_{\beta\in S_{j,n}}2\left|\sum_{i=1}^n\varphi_i^T(\theta-\beta)w_{i+1}\right|\geq M_1d_n2^{2j-2}h_n^{-2}-C_1\lambda_n\gamma\sqrt{q}2^jh_n^{-1}.\tag{3.19}$$

By Assumption (A3)(b), we have $\frac{\lambda_n\sqrt{q}2^jh_n^{-1}}{d_n2^{2j-2}h_n^{-2}}=\frac{\lambda_n}{2^{j-2}\sqrt{\lambda_{E,\max}(n)}}\xrightarrow[n\to\infty]{}0$. Then it follows that $M_1d_n2^{2j-2}h_n^{-2}>C_1\lambda_n\gamma\sqrt{q}2^jh_n^{-1}$ for all $n>N_3$ with N_3 being some positive integer. Therefore, by (3.19) and the Markov inequality, we have

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

$$
\begin{aligned}
&\mathrm{P}\left(\left\{\inf_{\beta\in S_{j,n}}\left(J_n(\beta)-J_n(\theta)\right)\le 0\right\}\cap A_n^c\right)\\
&\quad\le \mathrm{P}\left(\sup_{\beta\in S_{j,n}} 2\left|\sum_{i=1}^{n}\varphi_i^T(\theta-\beta)w_{i+1}\right|\ge M_1 d_n 2^{2j-2}h_n^{-2}-C_1\lambda_n\gamma\sqrt{q}2^j h_n^{-1}\right)\\
&\quad\le \frac{E\sup_{\beta\in S_{j,n}} 2\left|\sum_{i=1}^{n}\varphi_i^T(\theta-\beta)w_{i+1}\right|}{M_1 d_n 2^{2j-2}h_n^{-2}-C_1\lambda_n\gamma\sqrt{q}2^j h_n^{-1}}. \qquad (3.20)
\end{aligned}
$$

In addition, by Assumption (A1), we further assume that $E\left(w_{k+1}^2|\mathcal{F}_k\right)=\sigma_k^2\le\bar{\sigma}^2$ with $\bar{\sigma}$ being some constant. Then, by the definition of $S_{j,n}$, Jensen's inequality, and the Cauchy–Schwarz inequality, we have

$$
\begin{aligned}
E\sup_{\beta\in S_{j,n}} 2\left|\sum_{i=1}^{n}\varphi_i^T(\theta-\beta)w_{i+1}\right| &\le 2\sqrt{E\sup_{\beta\in S_{j,n}}\|\beta-\theta\|^2\left\|\sum_{i=1}^{n}\varphi_i^T w_{i+1}\right\|^2}\\
&\le 2^{j+1}h_n^{-1}\sqrt{E\left[\sum_{i=1}^{n}\varphi_i^T w_{i+1}\sum_{i=1}^{n}\varphi_i w_{i+1}\right]}. \qquad (3.21)
\end{aligned}
$$

Noting Assumption (A1), we have

$$
\begin{aligned}
E\left[\sum_{i=1}^{n}\varphi_i^T w_{i+1}\sum_{i=1}^{n}\varphi_i w_{i+1}\right] &= E\left[\sum_{i=1}^{n}\varphi_i^T\varphi_i w_{i+1}^2\right]=E\left[\sum_{i=1}^{n}E(\left[\varphi_i^T\varphi_i w_{i+1}^2\right]\mid\mathcal{F}_i)\right]\\
&\le \bar{\sigma}^2 E\sum_{i=1}^{n}\varphi_i^T\varphi_i\le\bar{\sigma}^2\mathrm{tr}\left(E\sum_{i=1}^{n}\varphi_i\varphi_i^T\right)\le\bar{\sigma}^2 p\lambda_{E,\max}(n). \qquad (3.22)
\end{aligned}
$$

Therefore, from (3.20) and (3.22), it follows that

$$
\begin{aligned}
&\mathrm{P}\left(\left\{\inf_{\beta\in S_{j,n}}\left(J_n(\beta)-J_n(\theta)\right)\le 0\right\}\cap A_n^c\right)\\
&\quad\le\frac{2^{j+1}\bar{\sigma}\sqrt{p}h_n^{-1}\lambda_{E,\max}(n)^{1/2}}{M_1 d_n 2^{2j-2}h_n^{-2}-C_1\lambda_n\gamma\sqrt{q}2^j h_n^{-1}}\le\frac{2\bar{\sigma}}{M_1 2^{j-2}-\frac{C_1\lambda_n\gamma}{\lambda_{E,\max}(n)^{1/2}}}.
\end{aligned}
$$

By Assumption (A3)(b), there is a finite $N_4\in\mathbb{N}_+$ such that for all $n>N_4$,

$$
\mathrm{P}\left(\left\{\inf_{\beta\in S_{j,n}}\left(J_n(\beta)-J_n(\theta)\right)\le 0\right\}\cap A_n^c\right)\le\frac{\bar{\sigma}}{M_1 2^{j-4}},
$$

which leads to

$$
\sum_{j\ge M,2^j\le\epsilon h_n}\mathrm{P}\left(\left\{\inf_{\beta\in S_{j,n}}\left(J_n(\beta)-J_n(\theta)\right)\le 0\right\}\cap A_n^c\right)\le\sum_{j\ge M}\frac{\bar{\sigma}}{M_1 2^{j-4}}\le\frac{\bar{\sigma}}{M_1}2^{-(M-5)}. \qquad (3.23)
$$

Therefore, for the given ϵ_1, there is a finite M_2 and N_5 such that for all $n>N_5$,

$$
\sum_{j\ge M_2,2^j\le\epsilon h_n}\mathrm{P}\left(\left\{\inf_{\beta\in S_{j,n}}\left(J_n(\beta)-J_n(\theta)\right)\le 0\right\}\cap A_n^c\right)\le\frac{\epsilon_1}{3}. \qquad (3.24)
$$

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

Thus, from (3.8), (3.9), (3.13), and (3.24), letting $\tilde{M} = 2^{M_2}$ and $N = \max\{N_1, \ldots, N_5\}$, we have, for all $n > N$, $\mathrm{P}(h_n \|\beta_n - \theta\| > \tilde{M}) \le \epsilon_1$. This completes the proof. ∎

Remark 3.9. From (3.7), it can be obtained that the smaller the number of nonzero elements of the parameter vector θ, the faster the convergence rate and thus the better the identification performance. This is further verified by the simulation Example 1 in section 6.

Based on Lemma 3.8, we give the following theorem demonstrating the set convergence in probability. Different from Theorem 3.7, the following theorem further states that the probability that the proposed algorithm correctly selects the nonzero elements of the unknown sparse parameter vector converges to one.

THEOREM 3.10. *Let* $\beta_n = (\beta_{1,n}^T, \beta_{2,n}^T)^T$ *with* $\beta_{1,n} \in \mathbb{R}^q$ *and* $\beta_{2,n} \in \mathbb{R}^{p-q}$ *being the vectors composed by the first* q *elements and the last* $p-q$ *elements of* β_n*, and let* $\theta = (\theta_{10}^T, 0_{p-q}^T)^T$ *with* $\theta_{10} \in \mathbb{R}^q$*. If Assumptions* (A1)–(A3) *hold, then we have the set convergence of the estimates with probability tending to one, i.e.,* $\lim_{n\to\infty} P(\beta_{2n} = 0_{p-q}) = 1$.

Proof. Let $t_n = \frac{\sqrt{\lambda_{E,\max}(n)}}{d_n}$. Denote the estimate $\beta_n = (\beta_{1,n}^T, \beta_{2,n}^T)^T$ as $\beta_{1,n} = \theta_{10} + t_n u_{1n}$, $\beta_{2,n} = t_n u_{2n}$, where $u_{1n} \in \mathbb{R}^q$ and $u_{2n} \in \mathbb{R}^{p-q}$. In addition, denote

$$\sum_{k=1}^{n} \varphi_k \varphi_k^T = \begin{bmatrix} \Phi_n^{(11)} & \Phi_n^{(12)} \\ \Phi_n^{(21)} & \Phi_n^{(22)} \end{bmatrix} \text{ and } \varphi_k = \begin{bmatrix} \varphi_k^{(1)} \\ \varphi_k^{(2)} \end{bmatrix}, \tag{3.25}$$

where $\Phi_n^{(11)} \in \mathbb{R}^{q\times q}$, $\varphi_k^{(q)} \in \mathbb{R}^d$ and others are with compatible dimensions. For any given $C > 0$, define

$$B_n = \{\omega :\ \beta_n \in \{\beta : \|\beta - \theta\| \le t_n C\}\}, \quad D_n = \{\omega :\ \beta_{2,n} = 0\}. \tag{3.26}$$

Define the points $\beta_n' = (\beta_{1,n}'^T, \beta_{2,n}'^T)^T$ within B_n as $\beta_{1,n}' = \theta_{10} + t_n u_1$, $\beta_{2,n}' = t_n u_2$, where $u = [u_1^T, u_2^T]^T$ satisfies $\|u\|^2 = \|u_1\|^2 + \|u_2\|^2 \le C^2$. Combining with Theorem 3.7, it follows that, ignoring an event that tends to zero, minimizing the objective function (3.2) is equivalent to minimizing the objective function $J_n(\theta_{10} + t_n u_1, t_n u_2)$ over the set $\{u : \|u\| \le C\}$. Next, we prove that for any given $\epsilon > 0$, there is $N \in \mathbb{N}_+$ such that $\mathrm{P}(D_n) \ge 1 - \epsilon$ for all $n > N$. Direct calculation for (3.2) leads to

$$\begin{aligned} J_n(\beta_n') = &\sum_{i=1}^{n} w_{i+1}^2 + (\beta_n' - \theta)^T \sum_{i=1}^{n} (\varphi_i \varphi_i^T)(\beta_n' - \theta) \\ &+ 2\sum_{i=1}^{n} \varphi_i^T (\theta - \beta_n') w_{i+1} + \lambda_n \sum_{j=1}^{p} |\beta_n'(j)|^\gamma. \end{aligned}$$

Then we can obtain

$$\begin{aligned} &J_n(\theta_{10} + t_n u_1, t_n u_2) - J_n(\theta_{10} + t_n u_1, 0) \\ &\quad = t_n^2 \sum_{i=1}^{n} \left(\varphi_i^{(2)T} u_2\right)^2 + 2t_n^2 \sum_{i=1}^{n} \left(\varphi_i^{(1)T} u_1\right)\left(\varphi_i^{(2)T} u_2\right) \\ &\qquad - 2t_n \sum_{i=1}^{n} w_{i+1} \left(\varphi_i^{(2)^T} u_2\right) + \lambda_n t_n^\gamma \sum_{j=1}^{p-q} |u_2(j)|^\gamma. \end{aligned} \tag{3.27}$$

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

For the first two terms on the right-hand side of (3.27), we have

$$t_n^2\sum_{i=1}^n\left(\varphi_i^{(2)T}u_2\right)^2+2t_n^2\sum_{i=1}^n\left(\varphi_i^{(1)T}u_1\right)\left(\varphi_i^{(2)T}u_2\right)$$
$$\geq 2t_n^2\sum_{i=1}^n\left(\varphi_i^{(1)T}u_1\right)\left(\varphi_i^{(2)T}u_2\right)\geq -2t_n^2u_1^T\left(\sum_{k=1}^n\varphi_k^{(1)}\varphi_k^{(2)T}\right)u_2. \tag{3.28}$$

By the Markov inequality and noting that $\|E\sum_{k=1}^n\varphi_k^{(1)}\varphi_k^{(2)T}\|\leq c_1\lambda_{E,\max}(n)$ for some $c_1>0$, for the above given ϵ, letting $M_1=\frac{3c_1C}{\epsilon}$, we have

$$\mathrm{P}\left(\left|t_n^2u_1^T\left(\sum_{k=1}^n\varphi_k^{(1)}\varphi_k^{(2)T}\right)u_2\right|\geq M_1\|u_2\|\lambda_{E,\max}(n)t_n^2\right)$$
$$\leq\frac{\epsilon E\left(t_n^2u_1^T\left(\sum_{k=1}^n\varphi_k^{(1)}\varphi_k^{(2)T}\right)u_2\right)}{3c_1\|u_2\|\lambda_{E,\max}(n)t_n^2C}\leq\frac{\epsilon}{3}. \tag{3.29}$$

Hence, it follows that $\mathrm{P}(E_n^c)\leq\epsilon/3$, where E_n is denoted as

$$E_n=\left\{\omega:\left|t_n^2u_1^T\left(\sum_{k=1}^n\varphi_k^{(1)}\varphi_k^{(2)T}\right)u_2\right|<M_1\|u_2\|t_n^2\lambda_{E,\max}(n)\right\}. \tag{3.30}$$

For the third term on the right-hand side of (3.27), similar to (3.21) and (3.22), noting that $\lambda_{\max}\{E\Phi_n^{(22)}\}\leq\lambda_{E,\max}(n)$, we can get

$$E\left|\sum_{i=1}^n w_{i+1}\left(\varphi_i^{(2)T}u_2\right)\right|\leq\left(E\left|\sum_{i=1}^n w_{i+1}\left(\varphi_i^{(2)T}u_2\right)\right|^2\right)^{1/2}$$
$$\leq\|u_2\|\bar\sigma\lambda_{\max}\{E\Phi_n^{(22)}\}^{1/2}\leq\|u_2\|\bar\sigma\sqrt{\lambda_{E,\max}(n)}, \tag{3.31}$$

where $\mathbb{E}\left(w_{k+1}^2|\mathcal{F}_k\right)\leq\bar\sigma^2$ with $\bar\sigma$ being some constant by Assumption (A1). By the Markov inequality, for the above given ϵ, letting $M_2=\frac{3\bar\sigma}{\epsilon}$, it follows from (3.31) that

$$\mathrm{P}\left(\left|\sum_{i=1}^n w_{i+1}\left(\varphi_i^{(2)T}u_2\right)\right|\geq M_2\|u_2\|\sqrt{\lambda_{E,\max}(n)}\right)\leq\frac{E\left|\sum_{i=1}^n w_{i+1}\left(\varphi_i^{(2)T}u_2\right)\right|}{M_2\|u_2\|\sqrt{\lambda_{E,\max}(n)}}\leq\frac{\epsilon}{3}. \tag{3.32}$$

Denote

$$F_n=\left\{\omega:-\sum_{i=1}^n w_{i+1}\left(\varphi_i^{(2)^T}u_2\right)\geq -M_2\|u_2\|\lambda_{E,\max}^{1/2}(n)\right\}. \tag{3.33}$$

Then, from (3.32), it follows that $\mathrm{P}(F_n^c)\leq\epsilon/3$. For the last term on the right-hand side of (3.27), noting that $[\sum_{j=1}^{p-q}|u_2(j)|^\gamma]^{2/\gamma}\geq\sum_{j=1}^{p-q}|u_2(j)|^2=\|u_2\|^2$, we have

$$\lambda_nt_n^\gamma\sum_{j=1}^{p-q}|u_2(j)|^\gamma\geq\|u_2\|^\gamma\lambda_nt_n^\gamma. \tag{3.34}$$

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

For all $\omega \in E_n \cap F_n$, from (3.28), (3.30), (3.33), and (3.34), we have

$$\begin{aligned} &J_n(\theta_{10} + t_n u_1, t_n u_2) - J_n(\theta_{10} + t_n u_1, 0) \\ &\geq \|u_2\|^\gamma \left(-M_1 \|u_2\|^{1-\gamma} t_n^2 \lambda_{E,\max}(n) + \lambda_n t_n^\gamma - 2 t_n M_2 \|u_2\|^{1-\gamma} \lambda_{E,\max}^{1/2}(n) \right). \end{aligned} \tag{3.35}$$

By Assumption (A3)(c) and noting that $\lambda_{E,\max}(n)/d_n \nrightarrow 0$, we have

$$\begin{aligned} \frac{\lambda_n t_n^\gamma}{t_n^2 \lambda_{E,\max}(n)} &= \frac{\lambda_n d_n^{2-\gamma}}{\lambda_{E,\max}(n)^{2-\frac{1}{2}\gamma}} \xrightarrow[n\to\infty]{} \infty, \\ \frac{\lambda_n t_n^\gamma}{t_n \sqrt{\lambda_{E,\max}(n)}} &= \frac{\lambda_n d_n^{2-\gamma}}{\lambda_{E,\max}(n)^{2-\frac{1}{2}\gamma}} \frac{\lambda_{E,\max}(n)}{d_n} \xrightarrow[n\to\infty]{} \infty. \end{aligned}$$

Therefore, from (3.35), if $\|u_2\| > 0$, then there is a finite $\tilde{N} \in \mathbb{N}_+$ such that $J_n(\beta_n) - J_n(\theta_{10} + t_n u_1, 0) > 0 \ \forall n > \tilde{N}$, which contradicts $\beta_n = \operatorname{argmin}_\beta J_n(\beta)$. Thus, for any $\omega \in E_n \cap F_n$, there is a finite N_1 such that $\beta_{2,n} = t_n u_2 = 0 \ \forall n > N_1$. Therefore, from (3.26) it follows that $B_n \cap E_n \cap F_n \subset D_n \cap E_n \cap F_n \ \forall n > N_1$. In addition, by Lemma 3.8, for the above given ϵ, there is an $N_2 \in \mathbb{N}_+$ such that $P(B_n^c) \leq \epsilon/3$ for all $n > N_2$. Hence, combining the results above (3.30) and below (3.33) and letting $N = \max\{N_1, N_2\}$, we have that for all $n > N$,

$$\begin{aligned} P(\beta_{2,n} = 0) = P(D_n) &\geq P(D_n \cap E_n \cap F_n) = 1 - P(D_n^c \cup E_n^c \cup F_n^c) \\ &\geq 1 - P(B_n^c) - P(E_n^c) - P(F_n^c) \geq 1 - \epsilon. \end{aligned}$$

This completes the proof. ∎

Using the central limit theorem, we immediately give the asymptotic normality of the estimated nonzero parameters below.

THEOREM 3.11. *Assume for each n that there is a nonrandom positive definite symmetric matrix R_n such that*

$$R_n^{-1} \Phi_n^{(11)} \xrightarrow{P} \mathbf{I}_p, \ \max_{1 \leq k \leq n} \|R_n^{-1/2} \varphi_k^{(1)}\| \xrightarrow{P} 0 \ \textit{and} \tag{3.36}$$

$$\lim_{k\to\infty} \mathrm{E}(w_{k+1}^2 | \mathcal{F}_k) = \sigma^2 \ \text{a.s.} \ \textit{for some constant } \sigma, \tag{3.37}$$

where $\varphi_k^{(1)}$ and $\Phi_n^{(11)}$ are defined in (3.25). *Denote the estimate $\beta_n = (\beta_{1,n}^T, \beta_{2,n}^T)^T$ and $\theta = [\theta_{10}^T, 0_{p-q}^T]^T$. For any nonrandom $\alpha_n \in \mathbb{R}^q$ satisfying $\|\alpha_n\| \leq 1$, let $s_n^2 = \sigma^2 \alpha_n^T R_n^{-1} \alpha_n$. If Assumptions* (A1)–(A3) *hold, then*

$$s_n^{-1} \alpha_n^T (\beta_{1n} - \theta_{10}) = s_n^{-1} \sum_{k=1}^n \alpha_n^T \left(\Phi_n^{(11)} \right)^{-1} \varphi_k^{(1)} w_{k+1} + o_p(1) \xrightarrow{\mathrm{d}} N(0,1), \tag{3.38}$$

where $\xrightarrow{\mathrm{d}}$ denotes convergence in distribution and $N(0,1)$ denotes the standard normal distribution.

Remark 3.12. The existence of a nonrandom matrix R_n satisfying conditions (3.36) in Theorem 3.11 can be regarded as an stability assumption of the matrix $\Phi_n^{(11)}$. Moreover, this assumption is necessary for asymptotic normality, and one can refer to Example 3 in [21], in which asymptotic normality fails to hold in the absence of (3.36). Besides, R_n can be selected as $\Phi_n^{(11)}$ if $\{\varphi_k^{(1)}\}$ is a determined sequence; R_n can be selected as $nE\varphi_n^{(1)}\varphi_n^{(1)T}$ if $\varphi_n^{(1)}\varphi_n^{(1)T}$ is a stationary and ergodic random sequence with a positive covariance matrix [39].

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

Proof. Denote $J_n(\beta)$ in (3.2) as $J_n(\beta) = J_n(\beta_1, \beta_2)$ with $\beta_1 \in \mathbb{R}^q$. By Theorem 3.7, we have $\|\beta_n - \theta\| \xrightarrow[n\to\infty]{} 0$ a.s. Since each component of θ_{10} is not equal to zero, when n is sufficiently large, each element of $\beta_{1,n}$ stays away from zero. Noting that the estimate $\beta_n = (\beta_{1,n}^T, \beta_{2,n}^T)^T$ is the minimum of $J_n(\beta)$, when n is sufficiently large, we have $\frac{\partial}{\partial \beta_1} J_n(\beta_{1,n}, \beta_{2,n}) = 0$, which implies that

(3.39)
$$-2\sum_{k=1}^{n}\Big(y_{k+1} - \beta_{1,n}^T\varphi_k^{(1)} - \beta_{2,n}^T\varphi_k^{(2)}\Big)\varphi_k^{(1)} + \lambda_n\gamma \mathrm{vec}\left(\mathrm{sign}(\beta_{1,n}(j))|\beta_{1,n}(j)|^{\gamma-1}\right)\Big|_{j=1}^{q} = 0.$$

From (2.1) and noting that $\theta = [\theta_{10}^T, 0_{1\times(p-q)}]^T$, it follows that $y_{k+1} - \theta_{10}^T\varphi_k^{(1)} = w_{k+1}$. Then, by (3.39), we get

(3.40)
$$\begin{aligned}&\sum_{k=1}^{n}\varphi_k^{(1)}\varphi_k^{(1)T}(\beta_{1,n} - \theta_{10})\\ &\quad = -\sum_{k=1}^{n}\beta_{2,n}^T\varphi_k^{(2)}\varphi_k^{(1)} + \sum_{k=1}^{n}\varphi_k^{(1)}w_{k+1} - \frac{1}{2}\lambda_n\gamma \mathrm{vec}\left(\mathrm{sign}(\beta_{1,n}(j))|\beta_{1,n}(j)|^{\gamma-1}\right)\Big|_{j=1}^{q}.\end{aligned}$$

Thus, direct calculation from (3.40) leads to

$$\begin{aligned}s_n^{-1}\alpha_n^T(\beta_{1,n} - \theta_{10}) &= -s_n^{-1}\alpha_n^T\left(\Phi_n^{(11)}\right)^{-1}\sum_{k=1}^{n}\beta_{2,n}^T\varphi_k^{(2)}\varphi_k^{(1)} + s_n^{-1}\sum_{k=1}^{n}\alpha_n^T\left(\Phi_n^{(11)}\right)^{-1}\varphi_k^{(1)}w_{k+1}\\ &\quad - \frac{1}{2}\lambda_n\gamma s_n^{-1}\alpha_n^T\left(\Phi_n^{(11)}\right)^{-1}\mathrm{vec}\left(\mathrm{sign}(\beta_{1,n}(j))|\beta_{1,n}(j)|^{\gamma-1}\right)\Big|_{j=1}^{q}. \qquad (3.41)\end{aligned}$$

For the first term on the right-hand side of (3.41), by Theorem 3.10 that $\lim_{n\to\infty} P(\beta_{2,n} = 0) = 1$, we have

$$\lim_{n\to\infty} \mathrm{P}\left(s_n^{-1}\alpha_n^T\left(\Phi_n^{(11)}\right)^{-1}\sum_{k=1}^{n}\beta_{2,n}^T\varphi_k^{(2)}\varphi_k^{(1)} = 0\right) = 1. \qquad (3.42)$$

For the last term on the right-hand side of (3.41), since $\beta_{1,n} \to \theta_{10}$, there is a constant C such that $|\beta_{1,n}(j)| \le C$ for $j = 1, \ldots, q$. By Assumption (A3)(a), we have

$$\begin{aligned}&\left|\lambda_n\alpha_n^T\left(\Phi_n^{(11)}\right)^{-1}\mathrm{vec}\left(\mathrm{sign}(\beta_{1,n}(j))|\beta_{1,n}(j)|^{\gamma-1}\right)\Big|_{j=1}^{q}\right|\\ &\quad \le \lambda_n\lambda_{\min}(n)^{-1}q^{1/2}C^{\gamma-1} = o_p(1), \qquad (3.43)\end{aligned}$$

which together with (3.41) and (3.42) gives

$$s_n^{-1}\alpha_n^T(\beta_{1,n} - \theta_{10}) = s_n^{-1}\sum_{k=1}^{n}\alpha_n^T\left(\Phi_n^{(11)}\right)^{-1}\varphi_k^{(1)}w_{k+1} + o_p(1). \qquad (3.44)$$

In view of (3.36) and (3.44), to prove (3.38), we need only show that

$$s_n^{-1}\sum_{k=1}^{n}\alpha_n^T R_n^{-1}\varphi_k^{(1)}w_{k+1} \xrightarrow{\mathrm{d}} N(0,1). \qquad (3.45)$$

Similar to [21], the desired conclusion (3.45) can be obtained by making use of a martingale central limit theorem of [7]. ∎

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

3.3. Comparison of Algorithm 3.1 with related methods. In this part, we compare the sparse identification Algorithm 3.1 with information criterion–based variable selection [1, 32], LASSO [33], and a bridge estimate [18].

Comparison with variable selection and order estimation based on information criterion. The variable selection problem aims to select a subset of relevant variables used in model construction. The usual approach is to select the optimal one from a set of reasonable models under some importance criteria, many of which contain measures of accuracy and the penalized term by the number of selected variables, for instance, AIC [1] and BIC [32] for stationary time series. Algorithm 3.1 in this paper not only fulfills the task of variable selection but also estimates the parameters corresponding to the selected variables. Moreover, compared with order estimation methods for stochastic systems, such as the control information criterion [5, 15], the algorithm in this paper solves the problem as well, and, furthermore, noncontributing variables within the order can also be selected out.

Comparison with LASSO and the bridge estimate. Compared with LASSO, Algorithm 3.1 does not require additional conditions, and compared with the bridge estimate, Algorithm 3.1 can be applied to general observations. In a typical setup, the sparsity problem can be described as follows [37]: Given an $n \times p$ matrix Ψ_n and a procedure of generating an observation such as

$$Y = \Psi_n \theta + W$$

with $Y = [y_1, \ldots, y_n]^T$, $\Psi_n = [\varphi_0, \ldots, \varphi_{n-1}]^T$, and $W = [w_1, \ldots, w_n]$, we are asked to recover θ from the observation Y such that θ is of the sparsest structure. The problem can be solved by the following regularization method:

$$\min_{\theta \in \mathbb{R}^p} \left\{ \|Y - \Psi_n \theta\|^2 + \lambda_n \|\theta\|_\nu^\nu \right\},$$

where $\nu > 0$ and $\|x\|_\nu$ is defined by $\|\theta\|_\nu = \sqrt[\nu]{\sum_{i=1}^p |\theta(i)|^\nu}$. LASSO (for $\nu = 1$), the bridge estimate (for $\nu > 0$), and Algorithm 3.1 (for $0 < \nu < 1$) in this paper all fall into this category, but Ψ_n in Algorithm 3.1 can be stochastic, whereas the others are deterministic. We then compare the application scope of these three algorithms. For LASSO, denote

$$\Phi_n = \sum_{k=1}^n \varphi_k \varphi_k^T = \begin{bmatrix} \Phi_n^{11} & \Phi_n^{12} \\ \Phi_n^{21} & \Phi_n^{22} \end{bmatrix}$$

with $\Phi_n^{11} \in \mathbb{R}^{q \times q}$ and $\beta_n = (\beta_{1,n}^T, \beta_{2,n}^T)^T$. [40] gave sufficient conditions for the set convergence in probability of the LASSO estimate: (a) $\frac{1}{n}\Phi_n \to \Phi$ with Φ being a positive definite matrix; (b) a strong irrepresentable condition, $|\Phi_n^{21} \left(\Phi_n^{11}\right)^{-1} \operatorname{sign}(\beta_{1,n})| \le \mathbf{1}_{p-q} - \eta$, with $\mathbf{1}_{p-q}$ being a $(p-q) \times 1$ vector of 1's, $\eta > 0$, and the inequality holding elementwise; and (c) λ_n chosen as $\lambda_n = n^\alpha$ with $\frac{1}{2} < \alpha < 1$. Algorithm 3.1 of this paper can also reach set convergence while covering condition (a) as a special case without requiring the strong irrepresentable condition (b).

For the bridge estimate, the conditions for the consistency of the estimates given by [18] are (a) $\frac{1}{n}\Phi_n \to \Phi$ with Φ being a positive definite matrix and (b) $\lambda_n n^{-1/2} \to 0$ and $\lambda_n^2 n^{-\gamma} \to 0$. This result is consistent with the result of Algorithm 3.1 when $C_1 n \le \lambda_{\min}(n) \le \lambda_{\max}(n) \le C_2 n$ for some constants C_1 and C_2. In addition, the theoretical results of Algorithm 3.1 go further and can be adapted to nonpersistent excitation cases; in particular, the data series $\{\varphi_k, y_{k+1}\}_{k \ge 1}$ can be generated by feedback control where φ_k may be stochastic.

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

4. Weighted L_γ regularization algorithm and its properties. LASSO is a popular technique for simultaneous estimation and variable selection. However, in some cases, LASSO is inconsistent for variable selection. [28] showed the conflict between the optimal prediction and consistent variable selection in LASSO. To address this issue, [43] proposed a new version of LASSO, adaptive LASSO, in which adaptive weights were used to penalize different parameters in the L_1 penalty. [42] extended this result to general observation cases. Inspired by the improvement of the convergence properties of LASSO with this technique, in order to extend the scope of application and improve the performance of the L_γ penalty, in this section, we present a two-step algorithm with the adaptively weighted $L_\gamma (0 < \gamma \leq 1)$ penalty term. The algorithm is more broadly applicable and has better convergence properties.

4.1. Weighted L_γ regularization algorithm. Assumption. Given constants γ and μ satisfying $0 < \gamma \leq 1$ and $\mu > 0$. To proceed, we first introduce the assumptions to be used for the theoretical analysis of the weighted L_γ regularization algorithm.

(B1) For the maximal and minimal eigenvalues of $\sum_{k=1}^{n} \varphi_k \varphi_k^T$ and the positive sequence $\{\lambda_n\}_{n\geq 1}$, it holds that

$$(a)\left(\frac{\log \lambda_{\max}(n)}{\lambda_{\min}(n)}\right)^{1-\frac{\gamma}{2}+\frac{\mu}{2}} \frac{\lambda_{\max}(n)}{\lambda_n} \xrightarrow[n\to\infty]{} 0 \text{ a.s.},$$

$$(b)\ \frac{\log \lambda_{\max}(n)^{\frac{\mu}{2}}}{\lambda_{\min}(n)^{1-\frac{\gamma}{2}+\frac{\mu}{2}}} \frac{\lambda_{\max}(n)}{\lambda_n^{\frac{\gamma}{2}}} \xrightarrow[n\to\infty]{} 0 \text{ a.s.}, \ (c)\frac{\log \lambda_{\max}(n)^{\frac{1}{2}+\frac{\mu}{2}}}{\lambda_{\min}(n)^{\frac{1}{2}-\frac{\gamma}{2}+\frac{\mu}{2}}} \frac{\lambda_{\max}(n)^{\frac{1}{2}}}{\lambda_n^{\frac{1}{2}+\frac{\gamma}{2}}} \xrightarrow[n\to\infty]{} 0 \text{ a.s.}$$

The adaptive sparse identification algorithm is proposed in Algorithm 4.1.

Remark 4.1. Here we discuss why γ can be set to 1 in Algorithm 4.1 but not in Algorithm 3.1. For Algorithm 3.1, the regularization term is $\lambda_n \sum_{l=1}^{p} |\beta(l)|^\gamma$. This setup has a shortcoming because it imposes equal penalties on both zero and nonzero parameters, making it ineffective in identifying zero elements when $\gamma = 1$. As a result, a smaller γ (i.e., $\gamma < 1$) is required. Specific examples can be found in Remark 3.1 and [40], which shows that LASSO (i.e., $\gamma = 1$) does not always possess variable selection consistency. For Algorithm 4.1, the regularization term is modified to $\lambda_n \sum_{j=1}^{p} \frac{1}{|\widehat{\theta}_{n+1}(j)|^\mu} |\beta(j)|^\gamma$, which assigns different weights to different parameters. Specifically, as the sample size grows, the weights for zero parameters will inflate to infinity, while the weights for nonzero parameters will converge to a finite constant. If a certain $\theta(j)$ is zero, then its estimate satisfies $\widehat{\theta}_{n+1}(j) \to 0$, and thus the corresponding penalty weight satisfies $1/|\widehat{\theta}_{n+1}(j)| \to \infty$. This implies that when n is large enough, the penalty for zero elements becomes much larger than for nonzero elements, making it easier to identify zero elements as zero. In this case, setting γ to 1 can still achieve variable selection.

Remark 4.2. Now we discuss the choice of λ_n in Algorithm 4.1. If we assume that $\frac{\lambda_{\max}(n)}{\lambda_{\min}(n)}(\frac{\log \lambda_{\max}(n)}{\lambda_{\min}(n)})^{\mu/2} \to 0$ a.s., then Assumption (B1) can be simplified to $\lambda_n = o(\lambda_{\min}(n))$ and $\lambda_{\max}(n)(\frac{\log \lambda_{\max}(n)}{\lambda_{\min}(n)})^{\frac{\mu}{2}} = o(\lambda_n)$. Denote $a_n = \lambda_{\max}(n)(\frac{\log \lambda_{\max}(n)}{\lambda_{\min}(n)})^{\frac{\mu}{2}}$ and $b_n = \lambda_{\min}(n)$. Then λ_n can be chosen as $\lambda_n = a_n^\eta b_n^{1-\eta}$ for any fixed $\eta \in (0, 1)$ to satisfy Assumption (B1). Specifically, by noting that $\frac{a_n}{b_n} = \frac{\lambda_{\max}(n)}{\lambda_{\min}(n)}(\frac{\log \lambda_{\max}(n)}{\lambda_{\min}(n)})^{\mu/2} \to 0$ a.s., it follows that $\frac{\lambda_n}{b_n} = (\frac{a_n}{b_n})^\eta \to 0$ and $\frac{a_n}{\lambda_n} = (\frac{a_n}{b_n})^{1-\eta} \to 0$ a.s.

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Algorithm 4.1 Weighted L_γ regularization.

Step 0 (initialization). For given $0<\gamma\le 1$ and $\mu>0$, choose a positive sequence $\{\lambda_n\}_{n\ge 1}$ satisfying Assumption (B1).

Step 1 (LS estimation). Based on $\{y_{k+1},\varphi_k\}_{k=1}^n$, compute the estimator:

$$\theta_{n+1}=\left(\sum_{k=1}^n \varphi_k\varphi_k^T\right)^{-1}\left(\sum_{k=1}^n \varphi_k y_{k+1}\right).$$

Let $\theta_{n+1}=[\theta_{n+1}(1),\dots,\theta_{n+1}(p)]^T$, and for $1\le j\le p$, define

$$\widehat{\theta}_{n+1}(j)=\theta_{n+1}(j)+\operatorname{sign}(\theta_{n+1}(j))\sqrt{\frac{\log\lambda_{\max}(n)}{\lambda_{\min}(n)}}.$$

Step 2 (sparse optimization with the L_γ penalty). With λ_n and $\widehat{\theta}_{n+1}$, optimize the objective function $\widehat{J}_n(\beta)=\sum_{k=1}^n\left(y_{k+1}-\beta^T\varphi_k\right)^2+\lambda_n\sum_{j=1}^p\frac{1}{|\widehat{\theta}_{n+1}(j)|^\mu}\times|\beta(j)|^\gamma$, and obtain

$$\widehat{\beta}_n=\left[\widehat{\beta}_n(1),\dots,\widehat{\beta}_n(p)\right]^T=\operatorname*{argmin}_{\beta}\ \widehat{J}_n(\beta), \tag{4.1}$$

$$\widehat{A}_n^*=\left\{j=1,\dots,p\,|\,\widehat{\beta}_n(j)=0\right\}. \tag{4.2}$$

4.2. Theoretical properties. Recall that the parameter vector is assumed to be $\theta=[\theta(1),\dots,\theta(q),\theta(q+1),\dots,\theta(p)]^T$ with $\theta(i)\ne 0$ for $i=1,\dots,q$ and $\theta(j)=0$ for $j=q+1,\dots,p$. For the estimate $\widehat{\beta}_n$ and $\widehat{A}_n^*$ generated by Algorithm 4.1, the almost sure convergence of $\widehat{\beta}_n$ and the almost sure set convergence of $\widehat{A}_n^*$ are given in the following theorems.

THEOREM 4.3. *If Assumptions* (A1), (A2)(a), *and* (A3)(a) *hold, then*

$$\lim_{n\to\infty}\widehat{\beta}_n(j)=\theta(j),\ j=1,\dots,q,\ \text{a.s.}$$

Proof. The proof is similar to that of Theorem 3.7 and so is omitted here. ∎

THEOREM 4.4. *If Assumptions* (A1), (A3)(a), *and* (B1) *hold, then there is an ω-space Ω_0 satisfying $P(\Omega_0)=1$, and for any $\omega\in\Omega_0$, there is an integer $N_0(\omega)$ such that $\widehat{A}_n^*=A^*$ for all $n\ge N_0(\omega)$.*

Proof. Combining the proof of Theorem 3.10 with the proof of Lemma 4 in [42] yields the theorem. ∎

4.3. Comparison of Algorithm 4.1 with related methods. Noting Remark 3.4, Algorithm 4.1 is more likely to produce sparse solutions than the algorithm in [42] and adaptive LASSO [43]. Moreover, Algorithm 4.1 covers the results of the adaptive LASSO and the algorithm in [42]. Specifically, when $\mu=\gamma=1$, by Remark 4.2, Assumption (B1) is degenerated to $\frac{\lambda_{\max}(n)}{\lambda_{\min}(n)}\sqrt{\frac{\log\lambda_{\max}(n)}{\lambda_{\min}(n)}}\to 0$ a.s., which is consistent with Assumption (A3) in [42]. If one further assumes that $\lambda_{\max}(n)=O(n)$ and $\lambda_{\min}(n)=O(n)$ a.s., then the result is consistent with the adaptive LASSO.

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

5. Application to typical scences.

5.1. Structure selection for a class of NARX models. This section applies Algorithm 3.1 to the structure selection of the NARX models with finite basis functions. One class of NARX models [41] is the kernel regression model,

$$y_{k+1} = \theta_N^T \varphi_{N,k} + w_{k+1}, \tag{5.1}$$

where y_{k+1} is the output, $\varphi_{N,k} = [\varphi_1(x(k)), \ldots, \varphi_m(x(k))]^T$ are the nonlinear basis functions, $x(k)$ contains all past and current variables, $\theta_N = [c_1, \ldots, c_m]^T$ is the corresponding coefficient, $w_{k+1} \in \mathbb{R}$ is the noise, and m is the number of basis functions. The objective of the NARX model structure selection is to select the contributing components from a large number of nonlinear basis functions. Algorithm 3.1 can be applied directly to the model (5.1) and is more efficient in reducing the model size. Now we consider a special class of the NARX model—the Hammerstein system as an example—and give the corresponding theoretical results. The Hammerstein model consists of a static single-valued nonlinear element followed by a linear dynamic element and can be described as

$$\begin{aligned} y_{k+1} &= a_1 y_k + \cdots + a_{n_y} y_{k+1-n_y} + b_1 f(u_k) + \cdots + b_{n_u} f(u_{k+1-n_u}) + w_{k+1}, \\ f(u_k) &= \sum_{j=1}^{s} d_j g_j(u_k), \end{aligned} \tag{5.2}$$

where $\{g_j(\cdot)\}_{j=1}^s$ are the basis functions. The system (5.2) can be rewritten as the form (5.1) by denoting

$$\begin{aligned} \theta_N &= \left[a_1, \ldots, a_{n_y}, (b_1 d_1), \ldots, (b_1 d_s), \ldots, (b_{n_u} d_1), \ldots, (b_{n_u} d_s)\right]^T, \\ \varphi_{N,k} &= \left[y_k, \ldots, y_{k+1-n_y}, g_1(u_k), \ldots, g_s(u_k), \ldots, g_1(u_{k+1-n_u}), \ldots, g_s(u_{k+1-n_u})\right]^T. \end{aligned}$$

Problem. The structure selection problem of the Hammerstein system (5.2) is to select the contributing basis functions from the candidate full basis functions $\{g_j(\cdot)\}_{j=1}^s$ using the observed data $\{y_{k+1}, \varphi_{N,k}\}_{k=1}^n$.

Before presenting the results, we first give the following assumptions and the corresponding proposition:

- **(C1)** $A(z) = 1 - a_1 z - \cdots - a_{n_y} z^{n_y}$ is stable and $b_1^2 + \cdots + b_{n_u}^2 \neq 0$.
- **(C2)** There is an interval $[a, b]$ such that $\{1, g_1(x), \ldots, g_s(x)\}$ is linearly independent.
- **(C3)** The sequence $\{u_k\}_{k \geq 1}$ is i.i.d., independent of the noise $\{w_k\}_{k \geq 1}$, whose density function is positive and continuous on $[a, b]$ and $0 < \mathbb{E}\, g_i^2(u_k) < \infty$ for $1 \leq i \leq s$.

PROPOSITION 5.1. [41] *If the Hammerstein system* (5.2) *satisfies Assumptions* (A1) *and* (C1)–(C3)*, then with* $0 < c_1 < c_2$, $0 < c_3 < c_4$, *we have*

$$c_1 n \leq \lambda_{\max}\left\{\sum_{k=1}^{n} \varphi_{N,k}\varphi_{N,k}^T\right\} \leq c_2 n,\ c_3 n \leq \lambda_{\min}\left\{\sum_{k=1}^{n} \varphi_{N,k}\varphi_{N,k}^T\right\} \leq c_4 n. \tag{5.3}$$

By use of Algorithm 3.1, we give the sparse estimate $\beta_{N,n}$ for the parameters in the system (5.2). Denote $\beta_{N,n} = [a_{1,n}, \ldots, a_{n_y,n}, (b_1 d_1)_n, \ldots, (b_1 d_s)_n, \ldots, (b_{n_u} d_1)_n, \ldots, (b_{n_u} d_s)_n]^T$, and define $\chi = [\chi(1), \ldots, \chi(s)]^T$ with $\chi(l) = \sum_{i=1}^{n_u} (b_i d_l)^2$. Then the estimate of χ can be obtained by $\chi_n = [\chi_n(1), \ldots, \chi_n(s)]^T$ with $\chi_n(l) = \sum_{i=1}^{n_u} (b_i d_l)_n^2$.

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

Moreover, denote $D^* = \{l : d_l = 0, \text{ for } l = 1, \ldots, s\}$, $D_n^* = \{l : \chi_n(l) = 0, \text{ for } l = 1, \ldots, s\}$. Assumption (C1) guarantees that $\{l : \chi(l) = 0\} = D^*$, which implies that D_n^* is indeed an estimate of D^*. Then we give the theoretical results for the structure selection of the contributing basis functions in $\{g_j(\cdot)\}_{j=1}^s$.

THEOREM 5.2. *Take* $\lambda_n = n^\alpha$ *with* $\frac{1}{2}\gamma < \alpha < \frac{1}{2}$. *If Assumptions* (A1) *and* (C1)–(C3) *hold for the Hammerstein system* (5.2), *then* $\lim_{n\to\infty} P(D_n^* = D^*) = 1$.

Proof. From (5.3) in Proposition 5.1, we have that $\lambda_{\max}\{\sum_{k=1}^n \varphi_{N,k}\varphi_{N,k}^T\} = O(n)$, $\lambda_{\min}\{\sum_{k=1}^n \varphi_{N,k}\varphi_{N,k}^T\} = O(n)$, and $E\lambda_{\max}\{\sum_{k=1}^n \varphi_{N,k}\varphi_{N,k}^T\} = O(n)$. Moreover, we can choose $d_n = c_5 n$ with $c_5 > 0$. Thus, noticing $\lambda_n = n^\alpha$ with $\frac{1}{2}\gamma < \alpha < \frac{1}{2}$, we can verify that (A2)–(A3) hold for the regression model (5.1)–(5.2). Thus, by Theorem 3.10, the results follow directly. ∎

5.2. Sparse identification of linear feedback control systems. This section applies Algorithm 3.1 to the sparse identification of the closed-loop systems using the self-tuning regulator (STR) control. Recall that the regressor is generally nonstationary and nonindependent for linear feedback control systems [17]. The classical STR control, first proposed in [2], consists of an LS estimation algorithm for a linear stochastic dynamic system coupled online with a "least variance" control law. The goal of STR is to minimize the tracking error of the system with unknown parameters. Consider the following sparse ARX system:

$$y_{k+1} = a_1 y_k + \cdots + a_{n_y} y_{k+1-n_y} + b_1 u_k + \cdots + b_{n_u} u_{k+1-n_u} + w_{k+1}, \tag{5.4}$$

where $y_{k+1} \in \mathbb{R}$ is the system output, $w_{k+1} \in \mathbb{R}$ is the system noise, $u_k \in \mathbb{R}$ is the feedback control, and $a_1, \ldots, a_{n_y}$ and $b_1, \ldots, b_{n_u}$ are the unknown sparse parameters. Denote

$$A(z) = 1 - a_1 z - \cdots - a_{n_y} z^{n_y},\ B(z) = b_1 + b_2 z + \cdots + b_{n_u} z^{n_u - 1},$$
$$\theta = \left[a_1, \ldots, a_{n_y}, b_1, \ldots, b_{n_u}\right]^T,\ \varphi_k = \left[y_k, \ldots, y_{k+1-n_y}, u_k, \ldots, u_{k+1-n_u}\right]^T.$$

Let $\{y_k^*\}$ be the deterministic bounded reference signal or regulation signal. For the system (5.4), two problems need to be solved: first, to use the STR control to make the closed-loop system track the reference signal $\{y_k^*\}$ and, second, to select the zero parameters accurately and estimate the nonzero parameters asymptotically under the STR control.

For the control step, let the LS parameter estimate for the system be $\theta_{L,n} = [a_{1,n}, \ldots, a_{n_y,n}, b_{1,n}, \ldots, b_{n_u,n}]^T$. The certainty equivalence principle [2] suggests an adaptive control defined as

$$u_k^0 = \frac{1}{b_{1,k}} \left\{ y_{k+1}^* + \left(b_{1,k} u_k - \theta_{L,k}^T \varphi_k \right) \right\}. \tag{5.5}$$

For the identification step, it is generally necessary to impose excitation conditions on the system, and thus the control design (5.5) needs to be modified. Specifically, in order not to make the system worse after applying the excitation, the diminishing excitation technique is introduced, and a zero-trending perturbation [14] is added to the control (5.5), i.e.,

$$u_k = u_k^0 + \frac{\nu_k}{r_{k-1}^{\bar{\varepsilon}/2}}, \quad k \geq 1, \tag{5.6}$$

where $\{\nu_k\}$ is an i.i.d. and bounded stochastic sequence satisfying $E(\nu_k) = 0$, $E(\nu_k^2) = 1$, $r_{k-1} = 1 + \sum_{i=1}^{k-1} \|\varphi_i\|^2$, $\bar{\varepsilon} \in (0, \frac{1}{2(\bar{n}_{yu}+1)})$, and $\bar{n}_{yu} = \max\{n_y, n_u\} + n_y - 1$. Next, we give the assumptions for (5.4) and the stability and optimality in Proposition 5.3.

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

(D1) The noise $\{w_k\}$ satisfies $\lim_{k\to\infty}\frac{1}{k}\sum_{j=1}^{k} w_j^2 = R > 0$ a.s.
(D2) The system is of minimum phase, i.e., $B(z)\neq 0\ \forall |z|\leq 1$.
(D3) $|a_{n_y}| + |b_{n_u}| \neq 0$.

PROPOSITION 5.3 ([14]). *If Assumptions* (A1) *and* (D1)–(D3) *hold, then the model* (5.4) *with the attenuating excitation control* (5.5) *based on the LS parameter estimate and* (5.6) *satisfies*

$$\limsup_{k\to\infty}\frac{1}{k}\sum_{i=1}^{k}\left(\|u_i\|^2+\|y_i\|^2\right)<\infty \quad \textit{a.s. and } \lim_{k\to\infty}\frac{1}{k}\sum_{i=1}^{k}(y_i-y_i^*)^2 = R \quad \text{a.s.},$$

and the regressor φ_k *satisfies the excitation*

(5.7)
$$\lambda_{\max}(n)\triangleq\lambda_{\max}\left\{\sum_{k=1}^{n}\varphi_k\varphi_k^T\right\}=O(n), \lambda_{\min}(n)\triangleq\lambda_{\min}\left\{\sum_{k=1}^{n}\varphi_k\varphi_k^T\right\}\geq cn^{1-\bar{\varepsilon}(t+1)} \text{ a.s.}$$

for some $c>0$, *which may depend on sample paths and the* $\bar{\varepsilon}$ *defined below* (5.6).

For the input and output signals generated by the system (5.4), by minimizing (3.2) in Algorithm 3.1, we can obtain the estimate of the sparse system parameters in (5.4). Denote the estimate as $\beta_{L,n}=[\beta_{L,n}(1),\dots,\beta_{L,n}(n_y+n_u)]^T$, and set

$$H^*=\{i:\ a_i=0 \text{ for } 1\leq i\leq n_y \text{ and } b_{i-n_y}=0 \text{ for } n_y+1\leq i\leq n_y+n_u\},$$
$$H_n^*=\{i:\beta_{L,n}(i)=0 \text{ for } 1\leq i\leq n_y+n_u\}.$$

Then, for the estimate $\beta_{L,n}$ obtained by Algorithm 3.1 with data $\{y_{k+1},\varphi_k\}_{k=1}^n$ generated from (5.4)–(5.6), the following theorem demonstrates the set convergence of the estimate in probability.

THEOREM 5.4. *If Assumptions* (A1) *and* (D1)–(D3) *hold, then* $\lim_{n\to\infty}P(H_n^*=H^*)=1$, *where* $\lambda_n=n^\tau$ *in Algorithm* 3.1 *with* $\tau\in(\frac{1}{2}\gamma+\frac{(1-\gamma)(2-\gamma)}{8-2\gamma},\frac{1}{2})$ *and* $\bar{\varepsilon}=\frac{1-\gamma}{8-2\gamma}\frac{1}{\bar{n}_{yu}+1}$ *in the controller* (5.6).

Proof. First, τ is well-defined, which can be verified by the following inequality:

$$\frac{1}{2}-\left(\frac{1}{2}\gamma+\frac{(1-\gamma)(2-\gamma)}{8-2\gamma}\right)=\frac{1}{2}(1-\gamma)-\frac{(1-\gamma)(2-\gamma)}{8-2\gamma}=(1-\gamma)\frac{1}{4-\gamma}>0.$$

Denote $\lambda_{E,\max}(n)=\lambda_{\max}\{E\sum_{k=1}^{n}\varphi_k\varphi_k^T\}$. From (5.7) in Proposition 5.3, we have $\lambda_{E,\max}(n)=O(n)$. Moreover, we can choose $d_n=c_1n^{1-\bar{\varepsilon}(t+1)}$ with $c_1\leq c$. By the specification of $\bar{\varepsilon}$ below (5.6) and noting that $\tau<\frac{1}{2}$, we have $0<\tau<\frac{1}{2}<1-\bar{\varepsilon}(t+1)<1$. Then it follows that

$$\frac{\log\lambda_{\max}(n)}{\lambda_{\min}(n)}=O\left(\frac{\log n}{n^{1-\bar{\varepsilon}(t+1)}}\right)\xrightarrow[n\to\infty]{}0,\ \frac{\lambda_n}{\lambda_{\min}(n)}=O\left(\frac{1}{n^{1-\bar{\varepsilon}(t+1)-\tau}}\right)\xrightarrow[n\to\infty]{}0,$$

$$\frac{\lambda_n}{\lambda_{E,\max}(n)^{1/2}}=O\left(\frac{1}{n^{\frac{1}{2}-\tau}}\right)\xrightarrow[n\to\infty]{}0,\ \frac{\sqrt{\lambda_{E,\max}(n)}}{d_n}=O\left(\frac{1}{n^{(1-\bar{\varepsilon}(t+1))-1/2}}\right)\xrightarrow[n\to\infty]{}0.$$

Moreover, by noting that $\bar{\varepsilon}=\frac{1-\gamma}{8-2\gamma}\frac{1}{t+1}$ and $\tau>\frac{1}{2}\gamma+\frac{(1-\gamma)(2-\gamma)}{8-2\gamma}$, we have $0<\tau-(\frac{1}{2}\gamma+\frac{(1-\gamma)(2-\gamma)}{8-2\gamma})=\tau-(\frac{1}{2}\gamma+\bar{\varepsilon}(t+1)(2-\gamma))$, which implies that

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

$$\frac{\lambda_n d_n^{2-\gamma}}{\lambda_{E,\max}(n)^{2-\frac{1}{2}\gamma}} = O\left(n^{\tau+(1-\bar{\varepsilon}(t+1))(2-\gamma)-(2-\frac{1}{2}\gamma)}\right)$$
$$= O\left(n^{\tau-\left(\frac{1}{2}\gamma+\bar{\varepsilon}(t+1)(2-\gamma)\right)}\right) \xrightarrow[n\to\infty]{} \infty.$$

By applying Theorem 3.10, the conclusion holds. ∎

Remark 5.5. The weighted L_γ regularization Algorithm 4.1 can also be applied to these two typical problems, and the analyses are similar and hence are omitted here.

6. Simulation study. This section sets up four simulations to validate the sparse identification performance of the proposed algorithms in this paper, including two finite impulse response (FIR) systems, a polynomial expansion NARX system, and a linear feedback control system. In this paper, we use the particle swarm algorithm to solve (3.3) and (4.1).

Example 1. For the simulation of sparsity and estimation performance, consider the following FIR system: $y_{k+1} = \theta^T \varphi_k + w_{k+1}$, where $\theta = (1_{q\times 1}, 0_{(30-q)\times 1})^T$ with $q = 5, 10, 15, 20, 25$, φ_k are randomly generated in the interval $[-5, 5]$, and the noise sequence $\{w_k\}$ is i.i.d. with the Gaussian distribution $N(0, 0.1)$ and independent of $\{\varphi_k\}$. From Figure 2, it can be seen that as the number of nonzero parameters q increases, the estimation error will be larger for the same number of samples, which also indicates that the smaller q is, the better the algorithm performs.

Example 2. For the system (5.1), a common type of function expansion is the polynomial expansion [8], whose basis function is

$$\varphi_j(x(k)) = y_{k-d_{j1}} \times \cdots \times y_{k-d_{ji}} \times u_{k-d_{j,i+1}} \times \cdots \times u_{k-d_{jl}}, \tag{6.1}$$

where $d_{j1}, \ldots, d_{jl} \in \mathbb{N}_+$, $l = 1, \ldots, M$ with M being the maximum order of the polynomial expansion. Consider such a polynomial expansion NARX model, where $M = n_u = n_y = 2$. Then the regressor $\varphi(k)$ contains $\frac{(M+n_y+n_u)!}{M!(n_y+n_u)!} = 15$ of possible basis functions. Let the real system be $y_{k+1} = \theta^T \varphi_k + w_{k+1}$, where $\theta = [\theta_1, \ldots, \theta_{15}]$,

$$\varphi_k = \big[u_k^2, u_k u_{k-1}, u_k y_k, u_k y_{k-1}, u_k, u_{k-1}^2, u_{k-1} y_k,$$
$$u_{k-1} y_{k-1}, u_{k-1}, y_k^2, y_k y_{k-1}, y_k, y_{k-1}^2, y_{k-1}, 1\big]^T.$$

The real parameters are set as $\theta = [0, -0.5, 0.7, 0, 0.45, 0, 0, -0.006, -0.5, 0, 0.008, -0.2, 0, 1, 0]^T$. In this example, we use the LS method in [6], the LASSO method in [33], the ridge regression method in [16], the elastic net method in [44], and Algorithm 3.1 to identify the system parameters, respectively. A unified objective function of these methods takes the following form:

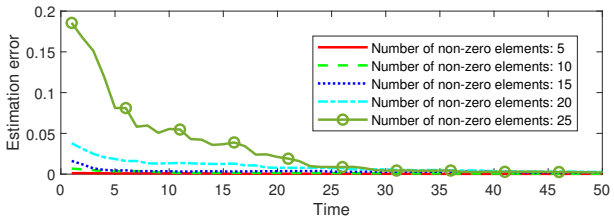

FIG. 2. *Estimation error with different number of nonzero elements.*

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

TABLE 1
The objective function and parameter settings corresponding to the algorithms.

Algorithm	Objective function	Algorithm parameters
LS	$\lambda_n = 0$	
LASSO	$\gamma = 1,\ \rho = 1$	$\lambda_n = n^{0.25}$
Ridge regression	$\rho = 0$	$\lambda_n = n^{0.05}$
Elastic net	$\gamma = 1$	$\rho = 0.5, \lambda_n = n^{0.25}$
Algorithm 3.1	$\rho = 1$	$\gamma = 0.4,\ \lambda_n = n^{0.25}$

TABLE 2
Comparison between Algorithm 3.1*, LS, LASSO, ridge regression, and elastic net under* 200 *observations.*

Algorithms	$\theta_1 = 0$	$\theta_2 = -0.5$	$\theta_5 = 0.45$	$\theta_7 = 0$	Time
Algorithm 2.1	-2.2404×10^{-16}	-0.4950	0.4472	3.0363×10^{-17}	6.9296 s
LS	-0.0011	-0.5010	0.4517	-0.0036	0.0228 s
LASSO	-0.0015	-0.4958	0.4481	-7.6290×10^{-4}	0.5586 s
Ridge regression	-6.9156×10^{-4}	-0.2805	0.3229	-0.0015	0.0348 s
Elastic net	-0.0016	-0.4975	0.4493	-0.0022	0.6818 s

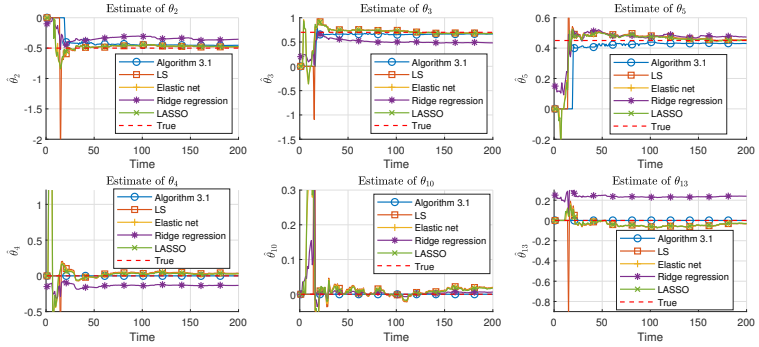

FIG. 3. *Comparison between Algorithm* 3.1*, LS, LASSO, ridge regression, and elastic net.*

$$J_{n+1}(\beta) = \sum_{k=1}^{n} \left(y_{k+1} - \beta^T \varphi_k\right)^2 + \lambda_n \rho \sum_{l=1}^{q} |\beta(l)|^\gamma + \lambda_n \frac{1-\rho}{2} \sum_{l=1}^{q} |\beta(l)|^2. \tag{6.2}$$

The form of the objective function corresponding to the algorithm and the parameter settings are given in Table 1. For this system, set the initial value to be i.i.d. with the input $\{u_k\}$ obeying the uniform distribution $U(-1,1)$ and the noise $\{w_k\}$, independent of $\{u_k\}$, obeying the normal distribution $N(0,0.1)$.

Table 2 and Figure 3 show the parameter estimation results of Algorithm 3.1, LS, LASSO, ridge regression, and elastic net with 200 observations, respectively. From Table 2 and Figure 3, we can see that Algorithm 3.1 has about the same accuracy in estimating the nonzero parameters as the rest of the algorithms but at the same time can significantly increase the accuracy of the selection of the zero parameters. When $n = 200$, the approximation solution of the estimates of the zero parameters are all less than 10^{-16}, indicating that Algorithm 3.1 performs better than the other algorithms in identifying the zero parameters. Table 2 also shows the running time of different methods. It is worth pointing out that the nonconvex criterion adopted in

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

this paper greatly improves the identification accuracy, although it inevitably increases the computational complexity, and the running time is relatively long.

Example 3. This example shows the application of the Algorithm 3.1 to the identification of a linear feedback control system. Let the ARX system be

(6.3)
$$y_{k+1} = \theta^T \varphi_k + w_{k+1} = \theta_1 y_k + \cdots + \theta_5 y_{k+1-5} + \theta_6 u_k + \cdots + \theta_{10} u_{k+1-5} + w_{k+1},$$

where the true sparse parameters are $\theta = [0.5, 3, 0, -1, 0.5, 0, 0, 0, 0, 0]^T$. The noise $\{w_k\}$ is i.i.d., obeying the normal distribution $N(0, 0.025)$. The discrete reference signal is written as $y^*_{k+1} = \sin\left(\frac{1}{200}k\right),\ k \geq 0$. Let the LS estimate be $\theta_k = [\theta_k(1), \ldots, \theta_k(10)]^T$. Then the self-tuning regulation control with diminishing excitation is

(6.4)
$$u_k = \frac{1}{\theta_k(6)}\left(y^*_{k+1} - \left(\theta_k(6)u_k - \theta_k^T \varphi_k\right)\right) + \frac{w'_k}{r_{k-1}^{\bar{\varepsilon}/2}},$$

where $r_{k-1} = 1 + \sum_{l=1}^{k-1} \|\varphi_l\|^2$, $\bar{\varepsilon} = \frac{1}{20}$, and $\{w'_k\}$ are i.i.d. with the uniform distribution $U(-0.1, 0.1)$. Figure 4 plots the outputs of the closed-loop control system (6.3)–(6.4) and the reference signals.

For the identification problem of the closed-loop control system, Table 3 and Figure 5 show that, as long as excitation conditions are satisfied, Algorithm 3.1 can accurately distinguish between zero and nonzero parameters and has more precise estimates of the zero parameters than other algorithms.

Example 4. This example aims to compare the performance of LS in [6] and adaptive LASSO in [42] with Algorithm 4.1 in this paper. Consider the following FIR system: $y_{k+1} = \theta^T \varphi_k + w_{k+1}$, where $\theta = [0, -1, 1, 2, 0.5, 0, 0, 0]^T$, φ_k are randomly generated in the interval $[-5, 5]$ and the noise sequence $\{w_k\}$ is i.i.d. with the Gaussian distribution $N(0, 0.1)$ and independent of $\{\varphi_k\}$. Set $\lambda_n = n^{0.65}$ for the adaptive LASSO in [42] and Algorithm 4.1. It can be seen from Figure 6 that Algorithm 4.1

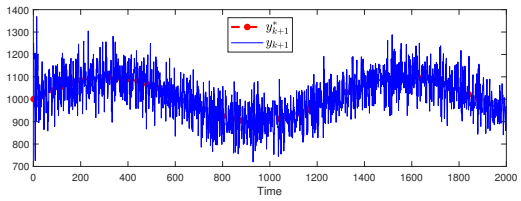

FIG. 4. *Trajectories of* y_{k+1} *vs.* y^*_{k+1} *for Example* 2.

TABLE 3

Comparisons between Algorithm 3.1*, LS, LASSO, ridge regression, and elastic net at the* 200*th iteration.*

	N = 200		
Algorithm	$\theta_2 = 0$	$\theta_4 = 0$	$\theta_{10} = 0$
Algorithm 1	1.0433×10^{-17}	7.3991×10^{-17}	2.7050×10^{-17}
LS	0.0367	−0.0469	−0.1366
LASSO	0.0486	−0.0912	−0.1460
Ridge regression	0.0358	−0.0160	−0.0386
Elastic net	0.0481	−0.0210	−0.1476

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

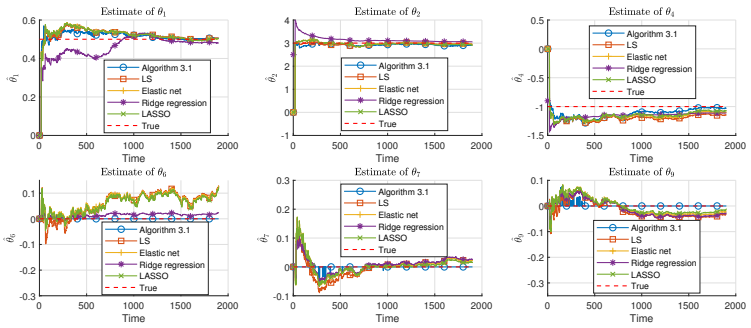

FIG. 5. *Comparisons between Algorithm* 3.1*, LS, LASSO, ridge regression, and elastic net.*

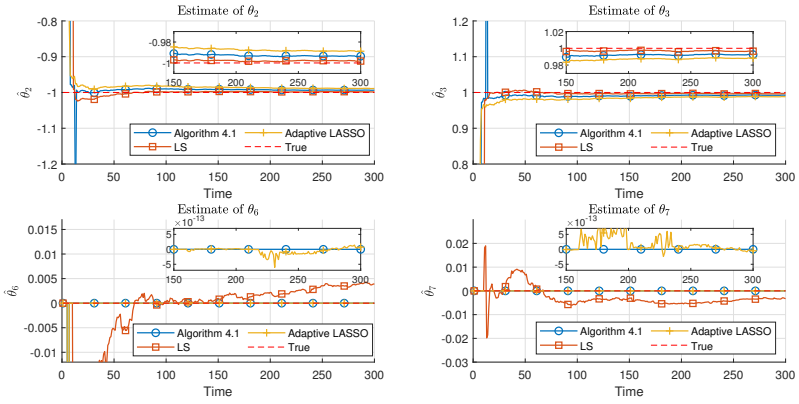

FIG. 6. *Comparison between Algorithm* 4.1*, LS, and adaptive LASSO.*

provides a more sparse estimate of the system parameters than LS and the algorithm in [42] and a more accurate estimate than the adaptive LASSO in [42].

7. Conclusion. This paper investigates two kinds of sparse identification algorithms based on the nonconvex L_γ penalty for the stochastic systems with non-i.i.d. and nonstationary observation sequences and non-i.i.d. noise. First, a one-step sparse parameter identification algorithm is proposed based on the $L_\gamma(0<\gamma<1)$ penalty and the residual sum of squares. The almost sure convergence, the set convergence in probability, and the asymptotic normality property of the estimates generated by the proposed algorithm are established. Moreover, to improve the performance of the L_γ regularization method, a two-step algorithm based on the adaptively weighted $L_\gamma(0<\gamma\leq 1)$ penalty is provided. Not only is the almost sure parameter convergence of the estimates established, but also the almost sure set convergence is achieved. Compared with existing literature, the theoretical results of the algorithms in this paper are applicable to the stochastic sparse system with non-i.i.d. and nonstationary observation sequences and non-i.i.d. noise, and the algorithms are more efficient in sparsity induction. Furthermore, these algorithms are successfully implemented in the structure selection of the NARX models and the sparse parameter identification of the linear feedback control systems.

In the future, since sparsity is often accompanied by high dimensionality, it is interesting to consider the identification of stochastic sparse systems in high-dimensional settings, i.e., $p=p(n)$. Moreover, it is essential to propose a recursive algorithm for the sparse system identification and, consequently, to design controls.

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

REFERENCES

[1] H. Akaike, *Information theory and an extension of the maximum likelihood principle*, in Selected Papers of Hirotugu Akaike, E. Parzen, K. Tanabe, and G. Kitagawa, eds., Springer-Verlag, Berlin, 1998, pp. 199–213.

[2] K. J. Åström and B. Wittenmark, *On self tuning regulators*, Automatica, 9 (1973), pp. 185–199.

[3] E. J. Candès and M. B. Wakin, *An introduction to compressive sampling*, IEEE Signal Process. Mag., 25 (2008), pp. 21–30.

[4] R. Chartrand and V. Staneva, *Restricted isometry properties and nonconvex compressive sensing*, Inverse Problems, 24 (2008), 035020.

[5] H. F. Chen and L. Guo, *Consistent estimation of the order of stochastic control systems*, IEEE Trans. Automat. Control, 32 (1987), pp. 531–535.

[6] H. F. Chen and L. Guo, *Identification and Stochastic Adaptive Control*, Springer Science & Business Media, New York, 2012.

[7] A. Dvoretzky, *Asymptotic normality for sums of dependent random variables*, in Proceedings of the Sixth Berkeley Symposium on Mathematical Statistics and Probability, Vol. 2, University of California Press, Berkeley, 1972, pp. 513–535.

[8] A. Falsone, L. Piroddi, and M. Prandini, *A randomized algorithm for nonlinear model structure selection*, Automatica, 60 (2015), pp. 227–238.

[9] J. Q. Fan and R. Z. Li, *Variable selection via nonconcave penalized likelihood and its oracle properties*, J. Amer. Statist. Assoc., 96 (2001), pp. 1348–1360.

[10] J. Q. Fan and J. C. Lv, *Nonconcave penalized likelihood with NP-dimensionality*, IEEE Trans. Inform. Theory, 57 (2011), pp. 5467–5484.

[11] S. Foucart and M. J. Lai, *Sparsest solutions of underdetermined linear systems via l_q-minimization for $0 < q \leq 1$*, Appl. Comput. Harmon. Anal., 26 (2009), pp. 395–407.

[12] Y. X. Fu and W. X. Zhao, *Support recovery and parameter identification of multivariate ARMA systems with exogenous inputs*, SIAM J. Control Optim., 61 (2023), pp. 1835–1860.

[13] A. Goldsmith, *Wireless Communications*, Cambridge University Press, Cambridge, 2005.

[14] L. Guo and H. F. Chen, *The Astrom-Wittenmark self-tuning regulator revisited and ELS-based adaptive trackers*, IEEE Trans. Automat. Control, 36 (1991), pp. 802–812.

[15] L. Guo, H. F. Chen, and J. F. Zhang, *Consistent order estimation for linear stochastic feedback control systems (CARMA model)*, Automatica, 25 (1989), pp. 147–151.

[16] A. E. Hoerl and R. W. Kennard, *Ridge regression: Biased estimation for nonorthogonal problems*, Technometrics, 12 (1970), pp. 55–67.

[17] D. W. Huang and L. Guo, *Estimation of nonstationary ARMAX models based on the Hannan-Rissanen method*, Ann. Statist., 18 (1990), pp. 1729–1756.

[18] K. Knight and W. J. Fu, *Asymptotics for LASSO-type estimators*, Ann. Statist., 28 (2000), pp. 1356–1378.

[19] D. Krishnan and R. Fergus, *Fast image deconvolution using hyper-Laplacian priors*, Adv. Neural Inf. Process. Syst., 22 (2009), pp. 1033–1041.

[20] M. J. Lai, Y. Y. Xu, and W. T. Yin, *Improved iteratively reweighted least squares for unconstrained smoothed l_q minimization*, SIAM J. Numer. Anal., 51 (2013), pp. 927–957.

[21] T. L. Lai and H. Robbins, *Consistency and asymptotic efficiency of slope estimates in stochastic approximation schemes*, Z. Wahrsch. verw. Gebiete, 56 (1981), pp. 329–360.

[22] T. L. Lai and C. Z. Wei, *Least squares estimates in stochastic regression models with applications to identification and control of dynamic systems*, Ann. Statist., 10 (1982), pp. 154–166.

[23] T. L. Lai and C. Z. Wei, *On the concept of excitation in least squares identification and adaptive control*, Stochastics, 16 (1986), pp. 227–254.

[24] J. H. Lin and G. Michailidis, *System identification of high-dimensional linear dynamical systems with serially correlated output noise components*, IEEE Trans. Signal Process., 68 (2020), pp. 5573–5587.

[25] N. Liu, W. Li, Y. J. Wang, R. Tao, Q. Du, and J. Chanussot, *A survey on hyperspectral image restoration: From the view of low-rank tensor approximation*, Sci. China Inf. Sci., 66 (2023), pp. 1–31.

[26] L. Ljung, *System identification*, in Wiley Encyclopedia of Electrical and Electronics Engineering, Vol. 17, J. G. Webster, ed., John Wiley, New York, 1999, pp. 1–19.

[27] K. Lu, H. Liu, L. Zeng, J. Y. Wang, Z. S. Zhang, and J. P. An, *Applications and prospects of artificial intelligence in covert satellite communication: A review*, Sci. China Inf. Sci., 66 (2023), pp. 1–31.

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.

[28] N. Meinshausen and P. Bühlmann, *Variable selection and high-dimensional graphs with the lasso*, Ann. Statist., 34 (2006), pp. 1436–1462.
[29] J. K. Pant, W. S. Lu, and A. Antoniou, *New improved algorithms for compressive sensing based on l_p norm*, IEEE Trans. Circuits Syst. II, Exp. Briefs, 61 (2014), pp. 198–202.
[30] M. M. Petrou and C. Petrou, *Image Processing: The Fundamentals*, John Wiley, New York, 2010.
[31] A. Ross and A. Jain, *Information fusion in biometrics*, Pattern Recognit. Lett., 24 (2003), pp. 2115–2125.
[32] G. Schwarz, *Estimating the dimension of a model*, Ann. Statist., 6 (1978), pp. 461–464.
[33] R. Tibshirani, *Regression shrinkage and selection via the lasso*, J. R. Stat. Soc. Ser. B. Methodol., 58 (1996), pp. 267–288.
[34] R. Tóth, B. M. Sanandaji, K. Poolla, and T. L. Vincent, *Compressive system identification in the linear time-invariant framework*, in 50th IEEE Conference on Decision and Control and European Control Conference, IEEE, New York, 2011, pp. 783–790.
[35] A. Wächter and L. T. Biegler, *On the implementation of an interior-point filter line-search algorithm for large-scale nonlinear programming*, Math. Program., 106 (2006), pp. 25–57.
[36] J. Woodworth and R. Chartrand, *Compressed sensing recovery via nonconvex shrinkage penalties*, Inverse Problems, 32 (2016), 075004.
[37] Z. B. Xu, X. Y. Chang, F. M. Xu, and H. Zhang, *$L_{1/2}$ regularization: A thresholding representation theory and a fast solver*, IEEE Trans. Neural Netw. Learn. Syst., 23 (2012), pp. 1013–1027.
[38] Z. B. Xu, H. Zhang, Y. Wang, X. Y. Chang, and Y. Liang, *$L_{1/2}$ regularization*, Sci. China Inf. Sci., 53 (2010), pp. 1159–1169.
[39] L. T. Zhang and L. Guo, *Adaptive identification with guaranteed performance under saturated observation and nonpersistent excitation*, IEEE Trans. Automat. Control, 69 (2024), pp. 1584–1599.
[40] P. Zhao and B. Yu, *On model selection consistency of Lasso*, J. Mach. Learn. Res., 7 (2006), pp. 2541–2563.
[41] W. X. Zhao, *Parametric identification of Hammerstein systems with consistency results using stochastic inputs*, IEEE Trans. Automat. Control, 55 (2010), pp. 474–480.
[42] W. X. Zhao, G. Yin, and E.-W. Bai, *Sparse system identification for stochastic systems with general observation sequences*, Automatica, 121 (2020), 109162.
[43] H. Zou, *The adaptive lasso and its oracle properties*, J. Amer. Statist. Assoc., 101 (2006), pp. 1418–1429.
[44] H. Zou and T. Hastie, *Regularization and variable selection via the elastic net*, J. R. Stat. Soc. Ser. B. Stat. Methodol., 67 (2005), pp. 301–320.

Downloaded 11/05/24 to 124.16.148.18 . Redistribution subject to SIAM license or copyright; see https://epubs.siam.org/terms-privacy

Copyright © by SIAM. Unauthorized reproduction of this article is prohibited.